

## Torch




### APPLICATION INFO:

- For Medium to Heavy Fabrication & Production Welding at high duty cycles
- Euro Connection suits most modern MIG welders or Bayonet Connection to suit some older machines

Part No.	Description	Unit
3-MTT4E/12	Euro Connection 3.5m (12ft)	Each
3-MTT4E/15	Euro Connection 4.5m (15ft)	Each
3-MTT4B/12	Bayonet Connection 3.5m (12ft)	Each
3-MTT4B/15	Bayonet Connection 4.5m (15ft)	Each

## Spares

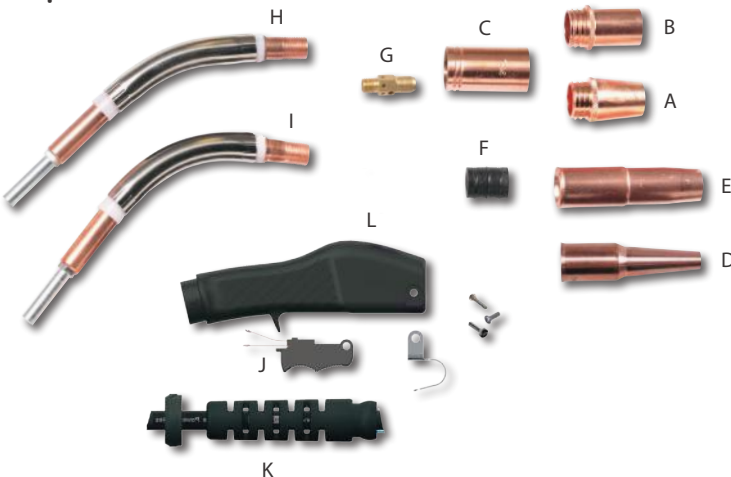

## Tips



Part No.	Description	Unit
P3-1430	Std 0.8mm (ref 14-30)	Pkt 5
P3-14H35	H/D 0.9mm (ref 14H-35)	Pkt 5
P3-14H40	H/D 1.0mm (ref 14H-40)	Pkt 5
P3-14H45	H/D 1.2mm (ref 14H-45)	Pkt 5
P3-14H52	H/D 1.2mm Alu/Flux-Core (14H-52)	Pkt 5
P3-14H116	H/D 1.6mm (ref 14H-116)	Pkt 5
WC-W14T35P	Tapered 0.9mm (ref 14T-35)	Pkt 5
WC-W14T40P	Tapered 1.0mm (ref 14T-40)	Pkt 5
WC-W14T45P	Tapered 1.2mm (ref 14T-45)	Pkt 5
WC-W14T52P	Tapered 1.3mm (ref 14T-52)	Pkt 5
WC-14T116P	Tapered 1.6mm (ref 14T-116)	Pkt 5

Part No.	Description	REF	Unit
P3-54A	Gas Diffuser / Tip Holder (ref 54A)	G	Pkt 2
WC-TW84A	Handle & Cable Support	L/K	Each
P3-34CT	Insulator H/Duty Copper (ref 34CT)	C	Pkt 2
P3-34A	Insulator Std Black (ref 34A)	F	Pkt 2
P3-64A45HD	Neck H/Duty 45DG Pk1 (ref 64A-45J)	I	Pkt 1
P3-64A60HD	Neck H/Duty 60DG Pk 1 (ref 64A-60J)	H	Pkt 1
P3-24CT62S	Nozzle H/Duty Conical 16mm (ref 24CT-62S)	A	Pkt 2
P3-24CT75S	Nozzle H/Duty Straight 20mm (ref 24CT-75S)	B	Pkt 2
P3-24A62	Nozzle Std Push-On Conical 16mm (ref 24A-62)	E	Pkt 2
WC-TW24AT37SSP	Nozzle Std Push-On Tapered 10mm (ref 24AT-37SSP)	D	Pkt 2
WC-TW94R	Trigger Switch	J	Each

## Liners



Part No.	Description	Unit
P3-44354515	Steel 0.9-1.2mm (ref 44-3545-15)	Pkt 1
P3-4411615	Steel 1.2-1.6mm (ref 44-116-15)	Pkt 1
P3-4456415	Steel 1.6-2.0mm (ref 44-564-15)	Pkt 1
P3-CTUL09	Teflon (Aluminium) 5m 0.9/1.0mm	Pkt 1
P3-CTUL12	Teflon (Aluminium) 5m 1.0/1.2/1.6mm	Pkt 1

