


3M[™] Double Coated Tape GPT-020 is the ideal general purpose industrial thin bond tape for a wide range of applications and substrates.

Expect performance. Spec 3M.

3 Science. Applied to Life.™

Your go-to tape for greater design possibilities.

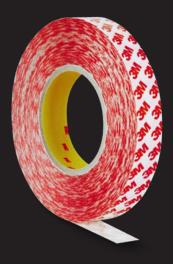


- Solventless adhesive technology
- High initial tack
- High thermal and humidity resistance
- High peel performance on a wide range of surfaces
- Superior high-temperature shear performance
- Adhesion to a wide variety of substrates ranging from metals to some plastics
- Easy handling and converting with GPT-020F due to film liner delivery
- Perfect for a variety of markets, including consumer appliances, industrial machinery, transportation, consumer electronics

Bonds to many high surface energy substrates and some low surface energy substrates, including:

- Stainless steel
- HDPE
- ► ABS
- ► Acrylic
- ► PP
- Polycarbonate
- Aluminum
- Glass

Creating designs in applications.

Rising to the challenge in many markets including consumer appliances, industrial machinery, transportation, signage, general industrial and consumer electronics.

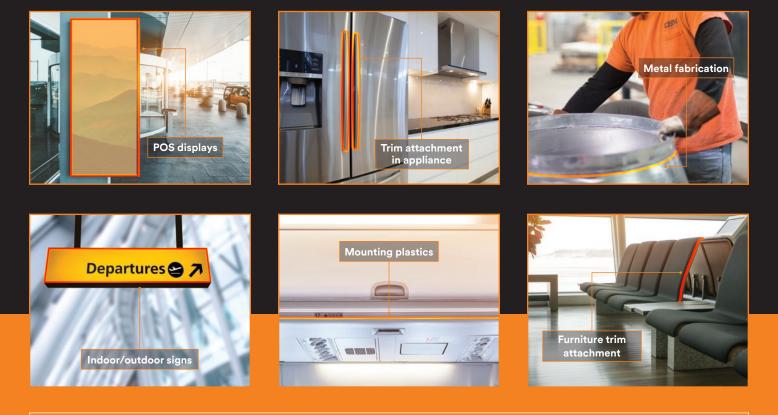

- ► POP/POS displays
- Light boxes
- Indoor/outdoor signs
- Paper bonding and packaging

- Metal fabrication
- Splicing and bonding
- Sports equipment
- Home decoration
- Trim attachment in appliance

- Mounting of plastic parts
- Mounting in electronics
- Furniture trim attachment

The next generation of thin bonding.



3M[™] Double Coated Tape GPT-020 Series

| | GPT-020P (Paper Liner) | GPT-020F (Film Liner) |
|------------------------------------|-------------------------------|------------------------------|
| Adhesive | Solventless acrylic | Solventless acrylic |
| Carrier type (thickness) | PET 0.5 mils (12 micron) | PET 0.5 mils (12 micron) |
| Liner type (thickness) | White PCK 4 mils (100 micron) | White PP 4 mils (100 micron) |
| Total tape thickness without liner | 8 mils (200 micron) | 8 mils (200 micron) |
| Short term temp. performance | 190°C | 190°C |
| Long term temp. performance | 90°C | 90°C |
| Color | Transparent | Transparent |



3M Australia Pty Ltd Industrial Adhesives and Tapes Division Bldg A, 1 Rivett Road North Ryde NSW 2113

Phone: 136 136 Email: 3M.support.safety.au@mmm.com Web: www.3M.com.au 3M New Zealand Ltd Industrial Adhesives and Tapes Division 94 Apollo Drive, Rosedale Auckland0632

Phone: 09 477 4040 Email: 3M.support.safety.nz@mmm.com Web: www.3M.co.nz Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

 $3 \mbox{M}$ and VHB are trademarks of $3 \mbox{M}$ Company. Please recycle. Printed in Australia.

© 3M 2022. All rights reserved.