



# 3/4" DOUBLE DIAPHRAGM PUMP

## AIR-OPERATED (DDP19)

2 Year  
Warranty

\*conditions apply

### PRODUCT OVERVIEW

The DDP19 offers an economical fluid transfer option where medium to high flow rates are needed with little back-pressure. The ability to "dry-run" allows easy priming while operating without any damage to the pump.

A removable air valve offers repairs to be made while the pump is still fitted in place for quick simple maintenance.

The Polypropylene / Aluminium body allows this pump to be used with a range of compatible chemicals as well as the new or used oils and engine coolants (RTU), diesel or oily water applications.

Fully repairable and spare parts are readily available. Not suitable for flammable liquids.

### FEATURES & BENEFITS

#### Up to 45L/min Flow Rate

Offers economical fluid transfer option where medium to high flow rates are needed with little back pressure

#### Speed Controlled

Offers control over pump output

#### Easy Self Priming

No damage to pump operating with little to no fluid flow (for short periods)

#### Fully Repairable

Provides longer service life

#### Polypropylene / Aluminium Body


Wide range of chemical compatibility for broader applications

#### Removable Air Valve

Easy swap out for repairs without time consuming dismantling / disconnecting

#### Exhaust Muffler

Reduces noise output with option for remote mounting

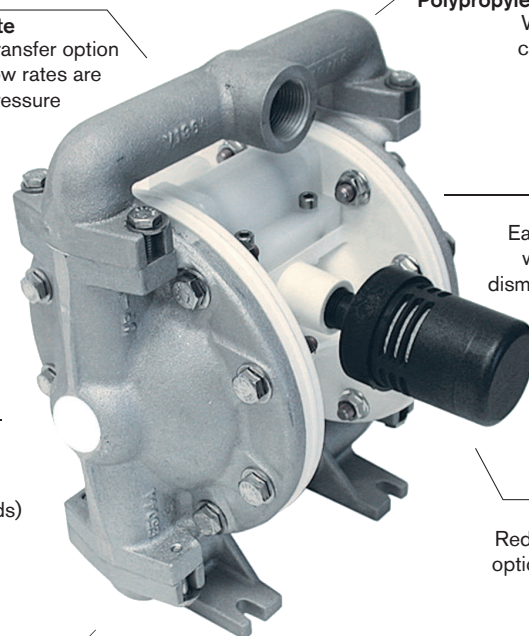

### TECHNICAL SPECIFICATIONS

Max Air Pressure: 690kPa (100psi)

Inlet / Outlet Ports: 3/4" NPT(F)

Air Inlet Size/Type: 3/8" NPT(F)

Max Flow Rate: 45 L/min (viscosity dependant)

Suction Lift: 3.9m (dry) / 6.7m (wet)

Max Solids Handling: 1.6mm (0.0625") diameter

Fluid temperature: -23°C - 88°C

Maximum noise level: 84 dB(A)

Fluid Compatability: Oils (new & used), Engine Coolants

(new & used), oily water, Diesel

### WETTED COMPONENTS

Polypropylene/Aluminium (body & valve seats)

Buna N (diaphragms)

Acetal (check valves)

### OPTIONAL ACCESSORIES

TA10S Air Valve 3/8"

### PACKAGE INCLUDES

DDP19 3/4" pump

Air Exhaust Muffler – 3/8" NPT(M)

Instruction / Installation Manual

For more information visit [www.macnaught.com.au/ddp19](http://www.macnaught.com.au/ddp19)

**MACNAUGHT Pty Ltd**  
41-49 Henderson Street  
Turrella, NSW, 2205  
Australia

**T** +61 2 9567 0401  
**F** +61 2 9597 7773  
**E** [info@macnaught.com.au](mailto:info@macnaught.com.au)  
**W** [www.macnaught.com.au](http://www.macnaught.com.au)

**MACNAUGHT USA Inc**  
614 South Ware Boulevard  
Tampa, Florida, 33619  
United States

**T** +1813 628 5506  
**F** +1509 694 8495  
**E** [info@macnaughtusa.com](mailto:info@macnaughtusa.com)  
**W** [www.macnaughtusa.com](http://www.macnaughtusa.com)