
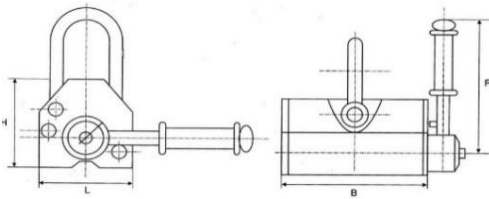


MSA Pro-Lift 1000 Lifting Magnet


P/N: PL1000

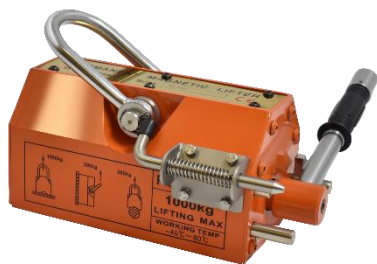

SPECIFICATIONS

Max Break away	3000 kg
Safe Working Load	1000 kg
Full Saturation Thickness	60 mm
Max Safe Shear	NA
Minimum Thickness for De-Stack	60 mm
Net Weight	53 kg
Height - Less Shackle	136 mm
Magnet Footprint (L x B)	152 mm x 264 mm
Handle Length - R	260 mm

MSA Pro-Lift 1000kg Safe Working Load

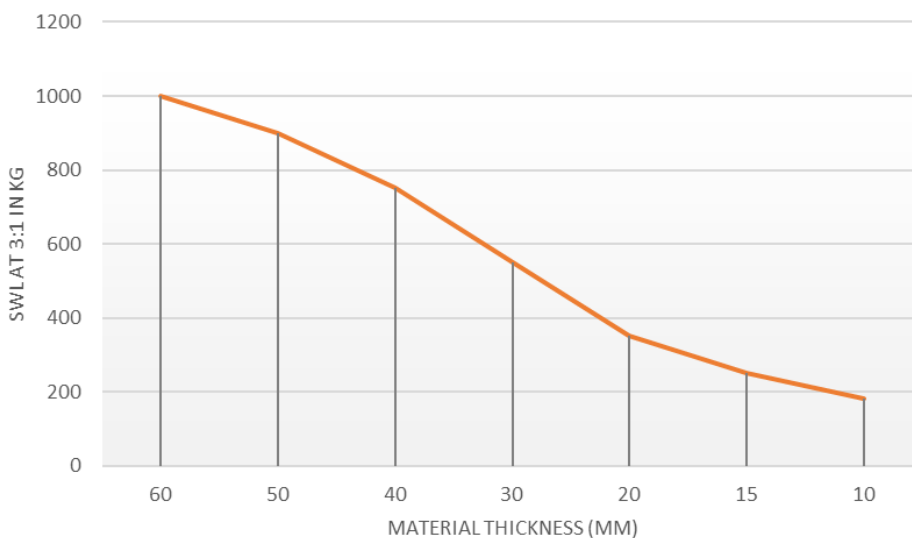

Fitted Safety Latch Included.

Complies with Lifting Devices Standard AS 4991-2004. Section 6.2.1 Load Control.

Material Thickness	SWL at 3:1 in KG
60 mm	1000 kg
50 mm	900 kg
40 mm	750 kg
30 mm	550 kg
20 mm	350 kg
15 mm	250 kg
10 mm	180 kg

It is incumbent upon your company to:

- Undertake a risk assessment to identify the hazards prevalent at your workplace which could impact upon the safe operation of the equipment and take action to control those hazards.
- Review the Safety Operating Procedure (SOP) to ensure it captures all the steps involved in your specific use(s) of the equipment and modify accordingly.
- Ensure that staff operating the equipment have been adequately trained in its safe use, provided with the appropriate Personal Protective Equipment (PPE) identified in the SOP and provided with a copy of the Safety Operating Procedure.

Your company also agrees to undertake a risk assessment, review the SOP in light of that risk assessment, make any modifications to reflect how the equipment is to be used at their workplace and then adequately train those people who are going to use the equipment.