MAGNETIC BASE DRILL

AUTOMATIC **QA-6500**

FEATURES


- · Fully automatic feed
- Superior 50mmø deep hole drilling automatically cuts holes from 14mmø - 65mmø
- Boosts productivity
- Powerful two speed drill motor 400/750 RPM

SELF FEEDING & LOAD DETECTION


The feeding is controlled by an onboard microcomputer. The feed rate begins slowly and then increases to the approriate speed for the cutter size and load conditions. The load detector clearly shows the amount of resistance on the cutter at anytime.

LIMIT SWITCH

When the drill has reached the top of its stroke, a limit switch stops the drill motor. There is also a limit switch at the bottom of drill stroke.






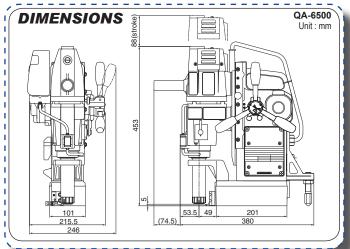

Two Speed Selection

Model No.

• Speed can be changed to suit the type and size of cutter.



Power

Source

Improve Bearing Bracket

· Our precision bearing bracket aligns cutters precisely, which increases cutter life.



Other Optional Items

OZBROACH (High Speed Steel One-Touch Type 25mm, 50mm and 75mm depth of cut)



OZBROACH

(Countersink - Product No. OT10-30CS)

* Only in Manual Feed Mode



JETBROACH

(TCT Carbide Tipped Cutters 25mm, 35mm, 50 & 75mm depth of cut)



Rated Power	No Load	Hole	Plate	Magnet	Weight
Consumption	Speed	Diameter	Thickness	Holding Power	

220~240V AC 1,010W **QA-6500** 400/750rpm 14 - 65mm 9 - 75mm 1,000 kg/f 26kg 50/60HZ