

[Back](#)

[www.dunlite.com.au](http://www.dunlite.com.au)

Phone: 1300 555 253 for your nearest dealer

## DGUH7S-2

**6500 Watt, Honda powered generator.**

**Power Rating:** 8 kVA  
**Cont. Output Watts:** 6500  
**Engine Model:** Honda GX390  
**Phase:** 1-Phase  
**Starting System:** Recoil  
**Fuel Tank Capacity:** 6.5 L  
**Noise Level @ 7m:** 76 dBA  
**Outlets:** 2 x 15 Amp plugs  
**Operation Hours @ 80% Load:** 2.8 hrs  
**Fuel Type:** Unleaded  
**Dimensions LxWxH:** 810 x 520 x 525 mm  
**Weight:** 80 kg

### ACCESSORIES


#### WHEEL KIT OPTIONS

- **DGX05** - One Axle & Two Wheels (2 kits required) OR
- **DGX01** - Wheel Barrow Kit (2x handles and 2x levelling feet), required with DGX05.

**DGX08** - Earth Leakage Protection  
 Contains two weather proof outlets (no earth stake).

**DGX11** - 25 Litre Long Range Fuel Tank

#### LIFTING BAR KIT

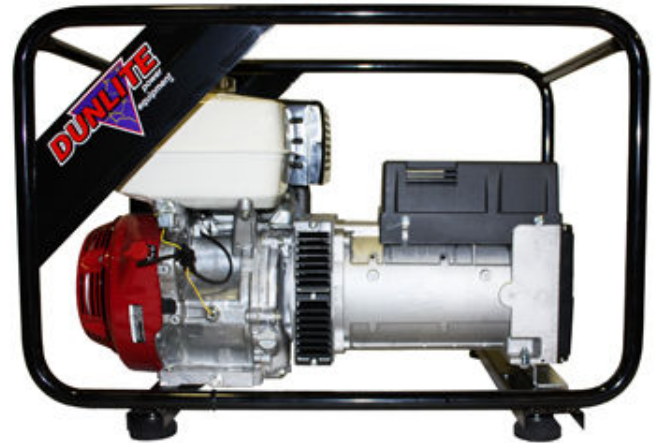

Specifications and product availability subject to variation without notice. The power rating of the Honda engine indicated above is 11 hp. This is the net power output tested on a production engine for the engine model and is measured in accordance with SAE J1349 at 3600 rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance and other variables. To find out the gross hp engine rating for the model indicated above, please contact us. Specials are valid while stocks last.