

Welass

Welding Products

Edition 4 Issued July 2017



Why Choose Weldclass?









Available from a Distributor near You!



Your next Helmet ...

Weldclass

DISPLAY STAND PROMAX WELDING HELMET RANGE

• Stores total of 8 Helmets with 2 on Display

the ultimate Helmet merchandiser!

More helmet stands on pages 13=14

Part No.

17-DS025

Celdclass Celdclass
Weldclass Weldclass Element 350 Plenex 350 Element 350 Plenex 350 Element 350 Plenex 350 Element 350 Plenex 350 Element 350 Plenex 350
Celdclass Promox SOD Promox SOD Promox SOD
Weldclass
www.weldclass.com.au



Your next Helmet ...

www.weldclass.com.au

Unit

Package

Description

Display Stand - Promax Helmets



DISPLAY STAND WELDING START-UP RANGE - BASIC

- 2 most common helmets
- Common Binzel and Tweco Style Mig parts
- Gas gear
- Gloves
- Basic accessories range
- Mini spools of wire
- Popular Gasless Wire
- Popular Stick Electrodes

Get a head start in welding with this easy-sell rangel.	ł
with this easy-sell range.	

Part No.	Description	Unit
17-DS025	Display Stand - Basic Range	Package





Available from a Distributor near You!



DISPLAY STAND WELDING START-UP RANGE - INTERMINIATE

- Full helmet range including lenses to suit (4 Models)
- Mig spares incl Binzel, Tweco and Bernard Style common parts
- Gas gear range basic most common accessories
- Most common earth clamps and general accessories
- Most common mig wires and General Purpose electrodes
- Nozzle dip, Anti-spatter, blue gloves and chalk







DISPLAY STAND COMPREHENSIVE RANGE - MIG TORCHES & SPARES

- Binzel, Tweco & Bernard Style Parts
- Most common sized Mig tips
- Common nozzles, tip holders, gas diffusers, etc.
- Liners including universal series liners
- Most common torch range

with easy selection chart to help your customers find the right part







DISPLAY STAND COMPREHENSIVE RANGE - TIG TORCHES & SPARES

- 17/18/26 series common parts collets, collet bodies, back caps, torch bodies, Gas lens cups and collet bodies, alumina cups
- 9/20 series common parts collets, collet bodies, back caps, torch bodies, Gas lens cups and collet bodies, alumina cups
- Universal Tig Tungstens
- The best Tig Welding Helmet in the World Jackson WH70
- · Aluminium and stainless steel filler rod
- Tig welding gloves
- · Two most common torches



www.weldclass.com.au



DISPLAY STAND COMPREHENSIVE RANGE - GAS EQUIPMENT

- Blowpipe Handle, Cutting attachment, Brazing Mixer
- Flashback arrestors and quick couplings
- LPG and Acetylene cutting, gouging and brazing tips common sizes
- Tip cleaners, oxy goggles and general consumables
- Range of common hoses & hose fittings
- Range of common regulators
- LPG Burner / Heating Torch

Quality gas gear that won't let you down







DISPLAY STAND COMPREHENSIVE RANGE - ACCESSORIES

- Earth clamps, Alligator & G-type
- · Electrode holders, mig pliers and magnetic welders squares
- Common brazing rod range
- Cable joiners and cable connectors
- Nozzle dip, anti-spatter, chalk
- Chipping hammers
- Booster clamps



www.weldclass.com.au



DISPLAY STAND COMPREHENSIVE RANGE - WELDING SAFETY & APPAREL

- Most common size welding jackets
- Leather jackets, FR with leather sleeves jackets, Hi-vis FR jackets, FR'Blue Flame' Jackets
- · Hoods and Aprons
- Full glove range riggers, blue gloves, long gloves, Tig gloves
- Most common blankets and curtains
- Ear plugs and common range of respirators
- Popular Safety Spec Range







DISPLAY STAND COMPREHENSIVE RANGE - TAIPAN ABRASIVES

- · Original and Platinum series flap discs mixed grits and sizes
- 'Original Cuttin Discs
- 'Platinum' Cutting Discs (wall stand only)
- 'Chop-saw' Cutting Wheels (wall stand only)
- Grinding Disc Range (wall stand only)
- Cup brushes, bevel brushes and spindle brushes
- · Pipeline wheels and crimped wheel brushes
- Miscellaneous hand brushes wooden and plastic

A Global Abrasive brand your customers will love!





DISPLAY STAND COMPREHENSIVE RANGE - PROMAX HELMETS & LENSES

- Promax 200 base helmet
- · Promax 350 Blue and 'Fire metal' everyday helmet
- Promax 500 Wide view helmet
- Range of Cover lenses to suit common helmets on the market
- Magnification lenses and batteries
- Universal sweatbands
- · Point-of-Sale helmet info cards

Become the 'go to' store for welding Helmets of Lenses!





DISPLAY STAND COMPREHENSIVE RANGE - PROMAX HELMETS

• Promax 200 – base helmet x 4

- Promax 350 Blue and 'Fire metal' everyday helmet x 16
- Promax 500 Wide view x 4
- Lenses to Suit
- Point-of-Sale Helmet info cards







Part No.	Description	Unit
17-DS037/1	Wall Stand - Promax Helmets	Package







JACKSON WH70 SERIES World's Best Visio S YEAR BALDER

11/1/1

DISPLAY STAND JACKSON® & PROMAX 400R HELMETS

- Jackson[®] WH70 Helmet
- Jackson[®] WH70 Airmax Helmet / Respirator System
- Weldclass Promax 400R Helmet / Respirator System
- Jackson Mag Lens Adaptors (not pictured)
- Jackson Hard-Hat Kit
- Banner Explains the Benefits of Jackson® Technology to your customers



ABRASIVES

A quick look at...

TAIPAN ABRASIVES BRAND

Worlds most Venomous snake...

And an Abrasive brand that won't let you down!

Tested, Tried & Proven

Used by Professional Fabricators world-wide for over 15 years. Backed by an aggressive R&D program, focused on delivering products that cut, remove & shape metal with maximum efficiency.

Safety First

Taipan discs* conform to AS1788.1, and are certified to EN standards by OSA &/or MPA regulatory bodies. *Cutting, grinding & flap discs



A Global Force in Abrasives Check out www.taipanabrasives.com

ABRASIVES GROUP

The brand with bite!



www.weldclass.com.au

R IHIPA

Abrasives



CUTTING DISCS TAIPAN ORIGINAL INOX THIN

- Excellent Disc Life and Value for Money
- Smooth & Safe Cutting Unique Anti-Friction Surface on both sides of disc: Improves the Ease of the cut, Increases Cut Speed and Prevents Jamming and Kick-back.
- Optimum Performance on both Mild and Stainless Steel.
- INOX/Iron-Free for Safe use on Stainless Steel
- Metal centre ring for maximum safety

world-wide
Taipan best seller!
seller!

١

Part No.	Description	Unit
TO-6202	100mm (4") x 1.0mm	Each
TO-6204	115mm (4.5") x 1.0mm	Each
TO-6218	115mm (4.5") x 1.6mm	Each
TO-6206	125mm (5") x 1.0mm	Each
TO-6220	125mm (5") x 1.6mm	Each
TO-6224	180mm (7") x 1.6mm	Each
TO-6226	230mm (9") x 1.9mm	Each



CUTTING DISCS TAIPAN PLATINUM 'RAZOR-HUB XT'

Hub XT with Safety Hub



Unique Steel Hub System Now you can have both...

Safety AND Fine/Fast cutting !!

Superior Safety & Strength

Hub system provides Rigidity & Strength like no other thin disc. Steel hub is larger than the grinder clamping area & will not break away around the edge of the clamping area.

Fast & Precise

1.0mm thickness for fine and fast cutting, yet exceptionally safe.

The inherent strength of the hub system means Less Flex, greater Precision and Control.

Looooong-Life!

The highest performing, longest-lasting Taipan thin disc yet!! Hub design also allows the whole disc to be used, no wastage.

Deeper Cutting & Better Vision

Tight radius of the hub allows for deeper cutting, and better vision. Safe full-depth cutting, due to the rigid anti-flex Hub system.







CUTTING DISCS TAIPAN ORIGINAL - STANDARD THICKNESS

- Excellent Disc Life and Value for Money
- Suitable for both Mild & Stainless Steels
- 2.5mm/2.8mm
 Thickness for General-Purpose Cutting & Maximum Safety
- INOX/Iron-Free for Safe use of Stainless Steel



Part No.	Description	Unit
TO-6270	100mm (4") x 2.5mm INOX Flat	Each
TO-6272	115mm (4.5") x 2.5mm INOX Flat	Each
TO-6274	125mm (5") x 2.5mm INOX Flat	Each
TO-6109	230mm (9") x 2.8mm INOX DPC	Each

CHOP-SAW DISCS TAIPAN ORIGINAL INOX

- Excellent Disc Life and Value for Money
- Smooth & Safe Cutting

 Anti-Friction Surface
 on both sides of disc:
 Improves the Ease of the
 cut, Increases Cut Speed
 and Reduces Wear & Tear
 on the Saw
- Optimum Performance on both Mild and Stainless Steel
- For Portable 240V Chop-Saws / Cutting Saws
- INOX (Iron-Free) for Safe Use on Stainless Steel

		-
Part No.	Description	Unit
TO-6532	350mm (14) x 2.8mm x 25.4mm Bore" - Max Rpm 4,400	Each
TO-6534	400mm (16) x 3.0mm x 25.4mm Bore" - Max Rpm 3,800	Each



GRINDING DISCS TAIPAN ORIGINAL INOX 'FAST'

- "Fast" Series: Medium Hardness for Fast Grinding of Steel & Stainless-Steel.
- INOX (Iron-Free) for Safe Use on Stainless Steel.
- Fast Metal Removal, Good Disc Life and Great Value for Money
- Designed to provide fast metal removal with moderate grinding pressure



Part No.	Description	Unit
TO-6120	100mm (4") x 6.5mm	Each
TO-6122	115mm (4½") x 6.5mm	Each
TO-6124	125mm (5") x 6.5mm	Each
TO-6128	180mm (7") x 7.0mm	Each
TO-6130	230mm (9") x 7.0mm	Each



Abrasives



FLAP DISCS TAIPAN ORIGINAL



world-wide Taipan best seller!

- Tried, Tested & Proven by Australian Fabricators for Over 15 Years.
- Up to 30% More Grit Cloth than other brands = Longer Life & Less Down-Time.
- Manufactured in Europe
- For Steel, Stainless-Steel & Aluminium

Part No.	Description	Unit
TO-5002	100mm (4") Z40 Grit	Each
TO-5004	100mm (4") Z60 Grit	Each
TO-5006	100mm (4") Z80 Grit	Each
TO-5008	100mm (4") Z120 Grit	Each
TO-5012	115mm (4.5") Z40 Grit	Each
TO-5014	115mm (4.5") Z60 Grit	Each
TO-5016	115mm (4.5") Z80 Grit	Each
TO-5018	115mm (4.5") Z120 Grit	Each
TO-5022	125mm (5") Z40 Grit	Each
TO-5024	125mm (5") Z60 Grit	Each
TO-5026	125mm (5") Z80 Grit	Each
TO-5028	125mm (5") Z120 Grit	Each
TO-5042	180mm (7") Z40 Grit	Each
TO-5044	180mm (7") Z60 Grit	Each
TO-5046	180mm (7") Z80 Grit	Each
TO-5048	180mm (7") Z120 Grit	Each

Why choose...

TAIPAN ORGINAL FLAP DISCS

- Thicker & more flaps
- Lasts longer
- OSA Approved for peace of mind
- Tried & Tested by Industry for over 15 Years



Call 1300 784 200 to find your nearest Taipan Distributor





Abrasives

CUP BRUSHES TWIST-KNOT TAIPAN

- Multi-Thread design: Supplied with thread adaptors to fit any common grinder thread: M14x2, M10x1.5 & M10x1.25
- Professional Quality: Tempered Steel Wire, Smooth Action and Perfect Balance
- Coarse Twist Knot Steel Wire: Aggressive Action, Rust & Scale Removal, Surface Preparation, etc
- Cup Shape for Flat Surfaces, External Corners & Edges, etc

Part No. TO-3030

TO-3032 TO-3620



CUP BRUSHES TWIST-KNOT W/SKIRT TAIPAN

- Removable Skirt: After Initial Wear, Remove the Skirt to give a '2nd life'
- **Professional Quality:** Tempered Steel Wire, Smooth Action and Perfect Balance
- Coarse Twist Knot Steel Wire: Aggressive Action, Rust & Scale Removal, Surface Preparation, etc
- Cup Shape for Flat Surfaces, External Corners & Edges, etc




		Part No.	Description	Unit
Description	Unit	TO-3040	075mm Multi-Thread Mild-Steel	Each
	•	TO-3042	100mm M14x2 Mild-Steel	Each
65mm Multi-Thread Mild-Steel	Each	TO-3628	100mm M14x2 Stainless-Steel	Each
75mm Multi-Thread Mild-Steel	Each	TO-3044	125mm M14x2 Mild-Steel	Each
75mm Multi-Thread Stainless-Steel	Each	TO-3630	125mm M14x2 Stainless-Steel	Each

CUP BRUSHES CRIMPED TAIPAN

- Professional Quality: Tempered Steel Wire, Smooth Action and Perfect Balance
- Brass-Coated Crimped (wavy) Wire for mild scrubbing • action, light rust removal, deburring, etc
- Cup Shape for Flat Surfaces, External Corners & Edges, etc



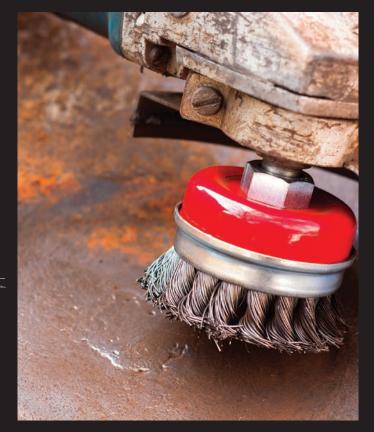





PIPELINE WHEEL BRUSHES TAIPAN

- 40 Knots Per Wheel for Long Brush Life
- Professional Quality: Tempered Steel Wire, Smooth Action and Perfect Balance
- · Ideal for Pipeline Weld Bead Cleaning; including during root pass, inter-pass, hot pass operations, etc
- Coarse Twist Knot Steel Wire For Fast Removal of Slag, Spatter & Oxidisation
- 22mm Bore/Arbor for use on 5", 7" or 9" angle grinders

Part No.

TO-3086

TO-3670

heel for Long uality: I Wire, Smooth fect Balance he Weld Bead ding during -pass, hot pass hot Steel Wire ral of Slag, isation bor for use on e grinders	HEAR E					
Descriptio		Unit	A Ver			P. W.
125mm x 6mm Twist-K Mild-Steel		Each	5			
125mm x 6mm Twist-K Stainless-Steel	ínot	Each	Z		Sen /	

BEVEL BRUSHES TWIST-KNOT TAIPAN

- Multi-Thread design: Supplied with thread adaptors to fit any common grinder thread: M14x2, M10x1.5 & M10x1.25
- Professional Quality: Tempered Steel Wire, Smooth Action and Perfect Balance
- Coarse Twist Knot Steel Wire: Aggressive Action, Rust & Scale Removal, Surface Preparation, etc
- Bevel/Angled/Saucer Shape for work in corners, contours, channels, Vs, etc



Part No.	Description	Unit
TO-3098	100mm (4") Multi-Thread Mild-Steel	Each
TO-3610	100mm (4") Multi-Thread Stainless-Steel	Each

WHEEL BRUSHES **CRIMPED TAIPAN**

- Multi-bore: Includes set of bushes to suit various grinders.
- Professional Quality: Tempered Steel Wire, Smooth Action
- For Bench / Pedestal Grinders •
- Brass-Coated Crimped (wavy) Wire for mild scrubbing • action, rust, scale, paint removal, deburring, etc









HAND BRUSHES 4-ROW WOODEN HANDLE TAIPAN

- Long Handle for Extended Reach
- Great Value
- Straight wire for heavy-duty action: rust & scale removal, de-slagging, etc
- 4-Row for flat surfaces, outside corners & edges, etc
- 355mm long, 72 tuft (18 x 4 rows)

HAND BRUSHES

4-ROW PLASTIC HANDLE TAIPAN

- Ergonomic & Long-Life Design
- Plastic Handle Prevents Bristles Coming Loose, even Under Vigourous Use
- Straight wire for heavy-duty action: rust & scale removal, de-slagging, etc
- 4-Row for flat surfaces, outside corners & edges, etc
- 280mm long, 58 tuft (14 x 4 rows + 2)







HAND BRUSHES 1 ROW TAIPAN

- Ergonomic & Long-Life Design
- Single row curved style ideal for internal corners, channels, etc
- Crimped (wavy) wire for mild scrubbing action, light rust removal, deburring, etc
- Plastic Moulded Handle



Abrasives



SPINDLE MOUNT END BRUSHES **TAIPAN**

- Professional Quality: Tempered Steel Wire, Smooth Action
- 6.4mm/¼″ Shaft/ Spindle
- **Brass-Coated Crimped** (wavy) Wire for mild scrubbing action, light rust removal, deburring, etc
- End shape for narrow areas, internal holes, cavities, cylinders, etc



Part No.	Description	Unit
TO-3060	17mm Crimped Brass-Coated Steel	Each
TO-3062	25mm Crimped Brass-Coated Steel	Each

SPINDLE MOUNT CUP BRUSHES

TAIPAN

- · Professional Quality: Tempered Steel Wire, Smooth Action
- 6.4mm/1/4" Shaft/Spindle
- Brass-Coated Crimped (wavy) Wire for mild scrubbing . action, light rust removal, deburring, etc
- · Cup Shape for Flat Surfaces, External Corners & Edges, etc



Part No.	Description	Unit
TO-3050	50mm Crimped Brass-Coated Steel	Each
TO-3052	50mm Crimped Brass-Coated Steel 75mm Crimped Brass-Coated Steel	Each

SPINDLE MOUNT WHEEL BRUSHES **TAIPAN**

- Professional Quality: Tempered Steel Wire, Smooth Action
- 6.4mm/1/4" Shaft/Spindle
- 50mm & 75mm: Brass-Coated Crimped (wavy) Wire for mild scrubbing action, light rust removal,
- deburring, etc
- 80mm: Twist-knot wire for coarse action, rust & scale removal, surface preparation, etc
- Wheel shape for narrow areas, corners, channels, internal curves, etc









A quick look at...

Weldclass GL-II GASLESS WIRE **Vacuum Foil-Sealed Spools** For exceptional storage life **Platinum Performance** Rated by thousands of Aussie fabricators as Australia's No. 1 Gasless Wire ! Weldclass Casless Welding WITE Jitra-Smooth Performanc uT-119 Ultra-Smooth & Easy to Use! **Many Applications** Very smooth Arc, Minimal spatter, Low-Fume, For All-Positional, Single and Multi-Pass Easy-to-remove Slag. Tolerant to variations in

machine settings, guick & easy to set up.

Welds. Ideal for mild or galvanised steel.

See Page 29 ...



www.weldclass.com.au



sseigejaan

Weldclass Customer driven innovation

Welding

S.COm

ELECTRODES WELDCLASS PLATINUM 12V (GP)

- Excellent Operator Appeal: Very Smooth & Stable Arc, Easy Striking, Low Spatter, Self-Detaching / Easy-to-remove Slag
- · User Friendly: Tolerant to Dirty / Rusty Steel & Poor Fit Up
- All-Positional: Fast-Freezing Slag for fillet & butt welding in All Positions, including Vertical Down

Deldclass

- · Ideal General Purpose electrode for fabrication, repair, fencing, Q.
- light structural & more Unbeatable
- Performance on: Mild, Galvanized, Plate, Sheet & Tubular/ **RHS Steel**
- AWS specification A5.1 E6013 / AS/NZS Specification 1553.1 F4112-0

Part No.	Description	Unit
2-E12V/26	2.6mm	Pkt 2.5kg
2-E12V/32	3.2mm	Pkt 5kg
P2-E12V/26HP	Handy-Pack 2.6mm	Pkt 16rd
P2-E12V/32HP	Handy-Pack 3.2mm	Pkt 14rd
	,	

Why choose...

PLATINUM 12V ELECTRODES

- Ultra smooth arc
- Easy striking
- All-positional, including vertical-down

Call today to request a sample pack!



Available from a Distributor near You!

Weldclass



ELECTRODES LOW-HYDROGEN 7016

- Low Fume and good crack resistance
- Good impact toughness
- Low Hydrogen electrode for welding high strength steel
- Commonly used on steel members subject to high load: machinery parts, ships, bridges, buildings and pressure vessels
- · All welding positions, excluding vertical down
- AWS Classification A5.1 E7016



Part No.		Description	Unit
2-701626	2.6mm		Pkt 5kg
2-701632	3.2mm		Pkt 5kg
2-701640	4.0mm		Pkt 5kg

ELECTRODES STAINLESS-STEEL 316L

- Very Smooth Running and Easy to use
- Heavy-Duty Re-Usable Plastic Packet with Screw-Top Lid
- For welding common 300 series stainless steel such as 301, 302, 304, 304L and 316L
- All welding
 positions, excluding
 vertical down
- AWS Classification A5.4 E316L-16



Part No.	Description	Unit
2-316L26	2.6mm	Pkt 2.5kg
P2-316L26	Handy-Pack 2.6mm	Pkt 16rď
2-316L32	3.2mm	Pkt 2.5kg
P2-316L32	Handy-Pack 3.2mm	Pkt 12rď
	•	

ELECTRODES STAINLESS-STEEL 309L

- Very Smooth Running and Easy to use
- Heavy-Duty Re-Usable Plastic
 Packet with Screw-Top Lid
- For welding of matching 309/309L and a wide range of 300 & 400 stainless steels
- Also used for welding dissimilar steels, including stainless-steel to mild steel
- All welding positions excluding vertical down
- AWS Classification A5.4 E309L-16



Part No.		Description	Unit
2-309L26	2.6mm		Pkt 2.5kg
2-309L32	3.2mm		Pkt 2.5kg Pkt 2.5kg





ELECTRODES UNIVERSAL 312

- For welding dissimilar or unknown steels
- Heavy-Duty Re-usable
 Plastic Pack with Screw Top Lid
- Commonly used for repair and maintenance
- All welding positions excluding vertical down
- AWS Classification AWS A5.4 E 312-16



Part No.	Description	Unit
2-31226	2.6mm	Pkt 2.5kg
P2-31226	Handy-Pack 2.6mm	Pkt 2.5kg Pkt 16rd
2-31232	3.2mm	Pkt 2.5kg
P2-31232	Handy-Pack 3.2mm	Pkt 12rď

ELECTRODES CAST IRON NCI

- High nickel content electrode for repairing and joining cast iron
- Suitable for mechanite, alloy and malleable cast iron
- Weld deposits are machinable
- Weld positions : flat, horizontal
- AWS Classification A5.15 ENi Cl



ELECTRODES HARDFACING 700

- For 'general purpose' hard-facing of earthmoving & ground-engaging implements
- Good Abrasion Resistance and Moderate Impact Strength
- 55 HRC Typical Hardness of All Weld Metal
- Ideal for points, bucket teeth, agricultural & earthmoving equipment
- Weld positions : Flat, horizontal and vertical up

GOUGING CARBONS

- Designed for gouging and cutting most steels
- High speed process
- · Removal of weld material, cracks or defect removal
- Operates on DC welding power source and requires air arc gouging torch with compressed air supply



Part No.	Description	Unit

	•	
2-GC5	5mm (3/16")	Box 50
2-GC65	6.5mm (1/4")	Box 50
2-GC8	8mm (5/16")	Box 50
2-GC95	9.5mm (3/8")	Box 50
2-GC13	13mm (1/2")	Box 50





MIG WIRE STEEL PLATINUM 'XT6'

- · Excellent operator appeal
- Excellent feedability, Low spatter & low fume
- Premium S6 grade, layer wound copper coated low carbon steel mig wire
- For welding a wide range of mild and mid strength low carbon steels and galvanised steel
- All positional
- AWS Classification AWS A5.18 ER70S-6



Description	Unit
200mm/5kg Spool 0.6mm	Spl 5kg
200mm/5kg Spool 0.8mm	Spl 5kg
200mm/5kg Spool 0.9mm	Spl 5kg
300mm/15kg Spool 0.8mm	Spl 15kg
300mm/15kg Spool 0.9mm	Spl 15kg
300mm/15kg Spool 1.2mm	Spl 15kg
	Description 200mm/5kg Spool 0.6mm 200mm/5kg Spool 0.8mm 200mm/15kg Spool 0.9mm 300mm/15kg Spool 0.9mm 300mm/15kg Spool 1.2mm

MIG WIRE STEEL MINI-SPOOLS

• Premium S6 grade, copper coated low carbon steel mig wire for welding a wide range of mild and mid strength steels



Part No.	Description	Unit
P2-084MW	100mm/0.7kg Spool 0.8mm	Spl 4in
P2-094MW	100mm/0.7kg Spool 0.8mm 100mm/0.7kg Spool 0.9mm	Spl 4in Spl 4in

MIG WIRE STAINLESS-STEEL 316LSI

- High grade wire for welding many 300 & 400 series stainless steels
- Low carbon
- Excellent edge wetting & arc stability
- AWS Classification A5.9 ER316Lsi



Description	Unit
mm/0.9kg Spool 0.8mm	Spl 0.9kg 4in
mm/0.9kg Spool 0.9mm	Spl 0.9kg 4in
mm/5kg Špool 0.8mm	Spl 5kg
mm/5kg Spool 0.9mm	Spl 5kg
mm/12.5kg Spool 0.9mm	Spl 12.5kg
	Description mm/0.9kg Spool 0.8mm mm/0.9kg Spool 0.9mm mm/5kg Spool 0.8mm mm/5kg Spool 0.9mm mm/12.5kg Spool 0.9mm

MIG WIRE ALUMINIUM 5356

- General purpose aluminium wire for welding a wide range of cast & wrought aluminium alloys.
- Ideal for welding
 5083,5086,5454 & 5356
 grade aluminium
- AWS Classification A5.10 ER5356



Part No.	Description	Unit
P2-MW535604/09	100mm/0.45kg Spool 0.9mm	Spl 0.45kg 4in
P2-MW535604/12	100mm/0.45kg Spool 1.2mm	Spl 0.45kg 4in
2-MW535608/09	200mm/2kg Spool 0.9mm	Spl 2kg
2-MW535608/10	200mm/2kg Spool 1.0mm	Spl 2kg
2-MW535608/12	200mm/2kg Spool 1.2mm	Spl 2kg
2-MW535612/09	300mm/6kg Spool 0.9mm	Spl 6kg
2-MW535612/10	300mm/6kg Spool 1.0mm	Spl 6kg
2-MW535612/12	300mm/6kg Spool 1.2mm	Spl 6kg





WIRE - GASLESS PLATINUM 'GL-11'

- Ultra-Smooth Running with Minimal Spatter
- · Suitable for Single or Multi-Pass Welds
- Vacuum Foil-Sealed Spool, for Exceptional Storage Life in All Conditions
- Easy to use, even on steel that is slightly rusty or dirty and on painted steel surfaces
- All positional wire, for use on mild and galvanised steel
- Ideal for portable use no gas required

Why choose...

- Ideal for outdoor or onsite use and welding in windy conditions
- AWS Classification A5.20 E 71T-11

Rated by Thonsands of Anssie Welder's as Anstralia's No. 1 Gastess Wire!

eldclass

Part No.	Description	Unit
2-088FM	200mm/4.5kg Spool 0.8mm	Spl 4.5kg
2-098FM	200mm/4.5kg Spool 0.9mm	Spl 4.5kg
2-128FM	200mm/4.5kg Spool 1.2mm	Spl 4.5kg
2-GWS1115/09	300mm/15kg Spool 0.9mm	Spl 15kg
2-GWS1115/12	300mm/15kg Spool 1.2mm	Spl 15kg
2-GWS1115/16	300mm/15kg Spool 1.6mm	Spl 15kg

PLATINUM GL-11 GASLESS WIRE



"... After inspecting the first few GL-11 welds I have finally found what I was looking for. I can honestly say none of the other brands I've used have come close to the quality of GL-11. It flows smoothly with minimal spatter and weld appearance is also very good ..." **Genuine End User Comment**





WIRE - GASLESS PROMAX 'E-21'

- Suitable for All-Positional, Single and Multi-Pass Welds
- · For welding mild & galvanized (Gal) steels
- Ideal for portable use no gas required
- Ideal for outdoor or onsite use and welding in windy conditions
- Premium E71T-11 Industrial Grade
- Layer wound for smooth wire feeding
- AWS Classification A5.20 E71T-11

Great Value! Industrial grade



Weldclass

Platinum GL-II Gasless Welding Wire

Ultra-Smooth Performance Iow-spatter & low-fume openium E717-11 grade

Part No.	Description	Unit
WC-00259	200mm/4.5kg Spool 0.8mm	Spl 4.5kg
WC-00260	200mm/4.5kg Spool 0.9mm	Spl 4.5kg
WC-00262	200mm/4.5kg Spool 1.2mm	Spl 4.5kg
	.	

Why choose...

PLATINUM GL-11 GASLESS WIRE

Looking for Australia's smoothest, most user-friendly gasless wire? If you want the best-of-the-best then you need Weldclass "Platinum GL-11".

check out ...







WIRE - GASLESS MINI-SPOOLS

- · Ideal for portable use no gas required
- Easy to use even on steel that is slightly rusty or dirty
- All positional wire, for general purpose use on mild and galvanised steel



Part No.	Description	Unit
P2-084FM	100mm/0.9kg Spool 0.8mm	Spl 0.9kg 4in
P2-094FM	100mm/0.9kg Spool 0.8mm 100mm/0.9kg Spool 0.9mm	Spl 0.9kg 4in Spl 0.9kg 4in



WIRE - HARDFACING CRC

- Premium quality gasless hardfacing wire for components subject to severe abrasion and moderate impact loading
- Very high chromium content for exceptional wear life
- Proven to outlast standard hardfacing electrodes and wires many times over
- Our No. 1 recommended hardfacing product for ground engaging equipment, such as points, tynes, bucket lips, and rippers etc.
- Also used for conveyer screws, crushers, dredge cutter heads and rollers etc.
- Gasless wire for ease of use in the field or in the workshop (no gas required)

Part No.	Description	Unit
2-HFCRC08/12	200mm/5kg Spool 1.2mm	Spl 5kg 8in
2-HFCRC15/12	200mm/5kg Spool 1.2mm 300mm/15kg Spool 1.2mm	Spl 15kg
2-HFCRC15/16	300mm/15kg Spool 1.6mm	Spl 15kg





Available from a Distributor near You!



WIRE - FLUX CORED PLATINUM 71-XM (E71T-1M)

- Flux Cored Wire used with Gas
- Smooth running low spatter wire for welding mild steel and medium strength steels.
- Good weld appearance, excellent operator appeal, good impact strength
- Commonly used in mining, machinery & heavy-structural applications
- All positional welding
- AWS Classification: A5.20 E71T-1M/9M H8
- Use with C02+Ar Mixed Gas

uttra-Smooth & stable arc = hassle-free welding & maximum productivity

Part No.	Description	Unit
WC-05362	1.2mm 300mm/15kg Spool	Spl 15kg
WC-05364	1.2mm 300mm/15kg Spool 1.6mm 300mm/15kg Spool	Spl 15kg Spl 15kg









FILLER ROD STAINLESS STEEL 316L

- For TIG welding common 300 series stainless steels, such as 301, 302, 304, 304L, 316, 316L also 409, 444 and 3cr12.
- AWS Classification A5.9 ER 316L



Part No.		Description	Unit
2-FR316L/16	1.6mm		Per Kg
2-FR316L/24	2.4mm		Per Kg
			5

FILLER ROD ALUMINIUM 5356

- For a wide range of aluminium alloys, general aluminium fabrication and repair
- 5% Magnesium content
- AWS Classification
 A5.10 ER 5356

Part No.		Description	Unit
		Beschption	
2-FR5356/16	1.6mm		Per Kg
2-FR5356/24	2.4mm		Per Kg
2-FR5356/32	3.2mm		Per Kg



- General purpose low temperature brazing
- Recommended for steel, nickel, copper, etc
- Very fast thin flowing alloy
- Excellent strength

Part No.	Description	Unit
P2-SB4516B/2	1.6mm Bare	Pkt 2
P2-SB4516B/5	1.6mm Bare	Pkt 5rd
P2-SB4516F/2	1.6mm Flux Coated	Pkt 2
P2-SB4516F/5	1.6mm Flux Coated	Pkt 5rd

BRAZING ROD MANGANESE BRONZE

- General purpose bronze filler rod
- For steel, cast iron, malleable iron, copper, copper alloys & stainless steel
- AWS Classification A5.8 RBCuZn-C

Part No.	Description	Unit
P2-FRMB24B/10	2.4mm Bare	Pkt 10rd
P2-FRMB24F/10	2.4mm Flux Coated	Pkt 10rd
P2-FRMB32B/10	3.2mm Bare	Pkt 10rd
P2-FRMB32F/10	3.2mm Flux Coated	Pkt 10rd

BRAZING ROD NICKEL BRONZE

- High strength joining of steel, cast iron and malleable iron
- Also used for: Fusion welding similar copper alloys, brazing nickel based alloys
- Also known as Nickel-Silver
- Wear resistant brazing build up of worn components



Part No.	Description	Unit
P2-FRNS24F/10	2.4mm Flux Coated	Pkt 10rd
P2-FRNS32F/8	3.2mm Flux Coated	Pkt 8rd





A quick look at...

Weldclass MIG TORCHES

No Quality Short-cuts!

Quality control & design managed by European based industry leaders with over 40 years of experience in Torch manufacturing.

High Quality Cables Maximum flexibilty with excellent heat & abrasion resistance

Attention to Detail = Reliability

We pay attention to the little things that can make or break a MIG Torch: Integrity of Cable Crimps, Switch Design, quality of Raw Materials/Components, etc.

Often it's what you can't physically see that has the greatest impact on reliability & productivity.



MIG Torches & Spares



MIG TORCHES PROMAX 15 (BINZEL 15 STYLE)

Weldclass

- European Style and Design
- Designed for Reliability, Easy Maintenance and Reduced
 Down-Time
- · Advanced Handle Design: Ergonomic & Lightweight
- Screwless Quick-Change Handle & Trigger = Change trigger and handle parts without tools
- · Knuckle Joint at handle for improved manoeuvrability
- High Quality Cables for Maximum Flexibility, Heat and Abrasion Resistance

APPLICATION INFO:

- 180 Amp Maximum Capacity (150A @ 60% duty cycle, using mixed argon gas)
- Heavy duty torch suitable for production welding
- Euro connection fits most common brands/models of MIG welders / wire feeders

Part No.	Description	Unit		
WC-03609	3m	Each		
WC-03610	4m	Each		
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Binzel, and the products are not original Binzel. Any references to Binzel trade names and/or part numbers are for identification purposes only.				

MIG TORCHES PROMAX 24 (BINZEL 24 STYLE)



- Designed for Reliability, Easy Maintenance and Reduced
 Down-Time
- Advanced Handle Design: Ergonomic & Lightweight
- Screwless Quick-Change Handle & Trigger = Change trigger and handle parts without tools
- Knuckle Joint at handle for improved manoeuvrability
- High Quality Cables for Maximum Flexibility, Heat and
- Abrasion Resistance

APPLICATION INFO:

- 240 Amp Maximum Capacity (220A @ 60% duty cycle, using mixed argon gas)
- Heavy duty torch suitable for production welding
- Euro connection fits most common brands/models of MIG welders / wire feeders

Part No.		Description	Unit
WC-03611	3m		Each
WC-03612	4m		Each
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Binzel, and the products are not original Binzel. Any references to Binzel trade names and/or part numbers are for identification purposes only.			



MIG Torches & Spares

MIG TORCHES PROMAX 25 (BINZEL 25 STYLE)



- Designed for Reliability, Easy Maintenance and Reduced
 Down-Time
- Advanced Handle Design: Ergonomic & Lightweight
- Screwless Quick-Change Handle & Trigger = Change trigger and handle parts without tools
- · Knuckle Joint at handle for improved manoeuvrability
- High Quality Cables for Maximum Flexibility, Heat and Abrasion Resistance

APPLICATION INFO:

- 230 Amp Maximum Capacity (200A @ 60% duty cycle, using mixed argon gas)
- · Heavy duty torch suitable for production welding
- Euro connection fits most common brands/models of MIG welders / wire feeders

Part No.		Description	Unit
WC-03614	3m		Each
WC-03615	4m		Each
		products only. Weldclass is not affiliated in any wa el trade names and/or part numbers are for identi	

MIG TORCHES PROMAX 36 (BINZEL 36 STYLE)

- European Style and Design
- Designed for Reliability, Easy Maintenance and Reduced
 Down-Time
- Advanced Handle Design: Ergonomic & Lightweight
 Screwless Quick-Change Handle & Trigger = Change
- trigger and handle parts without tools
- Knuckle Joint at handle for improved manoeuvrability
 High Quality Cables for Maximum Flexibility, Heat and
- Abrasion Resistance

APPLICATION INFO:

- 320 Amp Maximum Capacity (270A @ 60% duty cycle, using mixed argon gas)
- · Heavy duty torch suitable for production welding
- Euro connection fits most common brands/models of MIG welders / wire feeders

Part No.		Description	Unit	
WC-03617	3m		Each	
WC-03618	4m		Each	
WC-03619	5m		Each	
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Binzel, and the products are not original Binzel. Any references to Binzel trade names and/or part numbers are for identification purposes only.				



www.weldclass.com.au



MIG TORCH SPARES BZL 15 STYLE

- Suit Binzel 15 (MB 15) style MIG torches
- For Contact Tips, refer to "MIG Tips BZL Style M6x6"



D

F

D

Part No.	Description	REF	Unit
P3-B15SN	Neck - Standard Pk1 (ref 002.0009)	E	Pkt 1
P3-B15FN	Neck - Flexible (002.0029)	F	Pkt 1
P3-B15N	Nozzle - Conical 12mm (ref 145.0075)	А	Pkt 2
P3-B15NC	Nozzle - Cylindrical 16mm (ref 145.0041)	В	Pkt 2
P3-B15NS	Nozzle Spring (ref 002.0058)	С	Pkt 2
P3-B15TH	Tip Holder/Gas Diffuser (ref 002.0078)	D	Pkt 2
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Binzel, and the products are not original Binzel. Any references to Binzel trade names and/or part numbers are for identification purposes only.			

MIG TORCH SPARES BZL 24 STYLE

- Suit Binzel 24 (MB 24) style MIG torches
- For Contact Tips, refer to "MIG Tips BZL Style M6x6" & "MIG Tips BZL Style M6x8"

		T	В
Part No.	Description	REF	Unit
P3-B24GD	Gas Diffuser - Std White (ref 012.0183)	D	Pkt 2
P3-B24SN	Neck - Standard (ref 012.0001)	E	Pkt 1
P3-B24N	Nozzle - Conical 12.5mm (ref 145.0080)	А	Pkt 2
P3-B24NC	Nozzle - Cylindrical 16mm (ref 145.0047)	В	Pkt 2
P3-B24TH	Tip Holder Pk2 (ref 142.0003)	С	Pkt 2
	e original Weldclass products only. Weldclass is not affiliated in an wreferences to Binzel trade names and/or part numbers are for id		



MIG TORCH SPARES BZL 25 STYLE

- Suit Binzel 25 (MB 25) style MIG torches
- For Contact Tips, refer to "MIG Tips BZL Style M6x6" & "MIG Tips BZL Style M6x8"

 B
 C
 D
 E

 Description
 REF
 Unit

 k - Standard (ref 004.0012)
 E
 Pkt 1

F

В

Part No.	Description	REF	Unit
P3-B25SN	Neck - Standard (ref 004.0012)	E	Pkt 1
P3-B25FN	Neck - Flexible (ref 004.0032)		Pkt 1
P3-B25N	Nozzle - Conical 15mm (ref 145.0100)	А	Pkt 2
P3-B25NC	Nozzle - Cylindrical 18mm (ref 145.004)	В	Pkt 2
P3-B25NS	Nozzle Spring (ref 003.0013)	D	Pkt 2
P3-B25TH	Tip Holder (ref 142.0001)	С	Pkt 2
	ginal Weldclass products only. Weldclass is not affiliated in any ferences to Binzel trade names and/or part numbers are for ide		

MIG TORCH SPARES BZL 36 STYLE

- Suit Binzel 36 (MB 36) style MIG torches
- For Contact Tips, refer to "MIG Tips BZL Style M6x8" & "MIG Tips BZL Style M8x10"

			А
Part No.	Description	REF	Unit
P3-B36GD	Gas Diffuser Std White (ref 014.0261)	E	Pkt 2
P3-B36SN	Neck - Standard (ref 014.0006)	F	Pkt 1
P3-B36N	Nozzle - Conical 16mm (ref 145.0078)	А	Pkt 2
P3-B36NC	Nozzle - Cylindrical 18mm (ref 145.0045)	В	Pkt 2
P3-B36TH6	Tip Holder - For M6 Tips (ref 142.0005)	С	Pkt 2
P3-B36TH8	Tip Holder - For M8 Tips (ref 142.0020)	D	Pkt 2
The products advertised above are o	priginal Weldclass products only. Weldclass is not affiliated in any	way with Rig	zel and the

The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Binzel, and the products are not original Binzel. Any references to Binzel trade names and/or part numbers are for identification purposes only.










MIG LINERS BZL STYLE

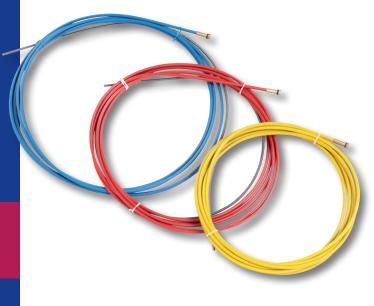

Suit Binzel Style MIG Torches

For 0.6mm-0.8mm Steel Wire

Note: For Teflon/Aluminium Liners, see end of this section

Part No.	Description	Unit
WC-00391	0.9 - 1.2mm Red 3m (ref 124.0026)	Pkt 1
WC-00393	0.9 - 1.2mm Red 4m (ref 124.0031)	Pkt 1
WC-00395	0.9 - 1.2mm Red 5m (ref 124.0035)	Pkt 1
WC-03340	0.9 - 1.2mm Red 11m	Each
WC-00397	1.2 - 1.6mm Yellow 3m (ref 124.0041)	Pkt 1
WC-00399	1.2 - 1.6mm Yellow 4m (ref 124.0042)	Pkt 1
WC-00401	1.2 - 1.6mm Yellow 5m (ref 124.0044)	Pkt 1
	original Weldclass products only. Weldclass is not affiliated in any way wil references to Binzel trade names and/or part numbers are for identificati	

Why choose...

WELDCLASS MIG TORCH SPARES

- No Quality Short-cuts
- Long-life parts that reduce down-time, cuts costs & increase productivity
- Quality packaging & handy quanities for individual portion control







MIG TORCH SPARES BZL STYLE - MISC







MIG TORCH PROMAX TWC 1 (MAGNUM 100L / TWECO 1 STYLE)

Weldclass

- Connection to suit Lincoln Power Mig 180C / SP-170T Small MIG Welders
- Light duty Gas/ Gasless Torch

Part No.		Description	Unit
WC-03957	3m		Each
		s products only. Weldclass is not affiliated in any reco trade names and/or part numbers are for id	

MIG TORCHES PROMAX TWC 2 (TWECO 2 STYLE)

- Tweco 2 style 250 Amp MIG torch, for Medium Fabrication
- Euro Connection suits most modern MIG welders •
- Robust Design withstands Heavy Duty Use







Imm

(IIIIII)

MIG TORCHES PROMAX TWC 4 (TWECO 4 STYLE)

- Tweco 4 style 400 Amp MIG torch
- For Medium to Heavy Fabrication & Production Welding at high duty cycles
- Euro Connection suits most modern
- MIG welders or Bayonet Connection to suit some older machines
- · Robust Design withstands
- Heavy Duty Use

Part No.	Description	Unit
3-MTT4E/12	Euro Fitting 3.5m (12ft)	Each
3-MTT4E/15	Euro Fitting 4.5m (15ft)	Each
3-MTT4B/12	Bayonet Fitting 3.5m (12ft)	Each
3-MTT4B/15	Bayonet Fitting 4.5m (15ft)	Each
The products advertised above are products are not original Tweco. An	e original Weldclass products only. Weldclass is not affiliated in any w y references to Tweco trade names and/or part numbers are for ident	ay with Tweco, and the tification purposes only.

Connection

Bayonet

Euro Connection



MIG TORCH SPARES TWC 1 / MAGNUM 100L STYLE

• Suit Tweco 1 & Lincoln Magnum 100L style MIG torches



Part No.	Description	REF	Unit	
P3-170GD	Gas Diffuser Suit Magnum 100L (ref 35-50)	С	Pkt 2	
P3-51	Gas Diffuser Suit TWC1 (ref 51)	D	Pkt 2	
P3-454015	Liner - Steel 0.9 - 1.2mm (ref 45-40-15)	Е	Pkt 1	
P3-2150	Nozzle - Conical 13mm (ref 21-50)	А	Pkt 2	
P3-170GN	Nozzle - Gasless (ref KP1939-1)	В	Pkt 2	
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Tweco, and the products are not original Tweco. Any references to Tweco trade names and/or part numbers are for identification purposes only.				

MIG TORCH SPARES TWC 2 STYLE

- Suit Tweco 2 style MIG torches
- For Contact Tips, refer to "MIG Tips TWC 2/4 Style"




Part No.	Description	REF	Unit
P3-T2HDGD	Gas Diffuser - Fits TWC2, Takes TWC4 Parts (52FN)	D	Pkt 2
P3-52	Gas Diffuser Std (ref 52)	E	Pkt 2
P3-32	Insulator - Black (ref 32)	С	Pkt 2
P3-42303515	Liner - Steel 0.8 - 0.9mm (ref 42-3035-15)	F	Pkt 1
P3-42404515	Liner - Steel 0.9 - 1.2mm (ref 42-4045-15)	F	Pkt 1
P3-2250	Nozzle - Conical 12mm (ref 22-50)	А	Pkt 2
P3-2262	Nozzle - Straight 16mm (ref 22-62)	В	Pkt 2
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Tweco, and the products are not original Tweco. Any references to Tweco trade names and/or part numbers are for identification purposes only.			

www.weldclass.com.au



MIG TORCH SPARES TWC 4 STYLE

- Suit Tweco 4 style MIG torches
- For Contact Tips, refer to "MIG Tips TWC 2/4 Style"

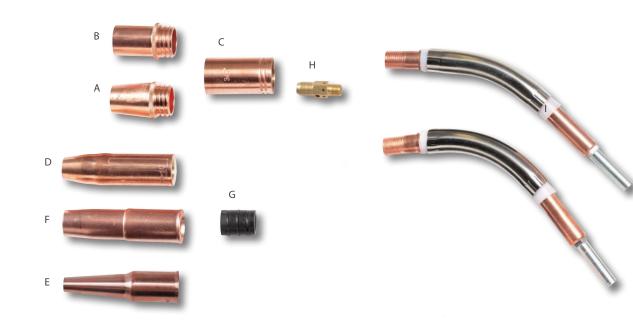

Part No.	Description	REF	Unit	
P3-54A	Gas Diffuser / Tip Holder (ref 54A)	Н	Pkt 2	
WC-TW84A	Handle & Cable Support	N/L	Each	
P3-34CT	Insulator H/Duty Copper (ref 34CT)	С	Pkt 2	
P3-34A	Insulator Std Black (ref 34A)	G	Pkt 2	
P3-44354515	Liner - Steel 0.9-1.2mm (ref 44-3545-15)	М	Pkt 1	
P3-4411615	Liner - Steel 1.2-1.6mm (ref 44-116-15)	Μ	Pkt 1	
P3-4456415	Liner - Steel 1.6-2.0mm (ref 44-564-15)	Μ	Pkt 1	
P3-64A45HD	Neck H/Duty 45DG Pk1 (ref 64A-45J)	J	Pkt 1	
P3-64A60HD	Neck H/Duty 60DG Pk 1 (ref 64A-60J)	Ι	Pkt 1	
P3-24CT62S	Nozzle H/Duty Conical 16mm (ref 24CT-62S)	А	Pkt 2	
P3-24CT75S	Nozzle H/Duty Straight 20mm (ref 24CT-75S)	В	Pkt 2	
P3-2350	Nozzle Self-Insulated 13mm (ref 23-50)	D	Pkt 2	
P3-24A62	Nozzle Std Push-On Conical 16mm (ref 24A-62)	F	Pkt 2	
P3-24A75	Nozzle Std Push-On Straight 20mm (ref 24A-75)		Pkt 2	
WC-TW24AT37SSP	Nozzle Std Push-On Tapered 10mm (ref 24AT-37SSP)	Е	Pkt2	
WC-TW94R	Trigger Switch	Κ	Each	
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Tweco, and the products are not original Tweco. Any references to Tweco trade names and/or part numbers are for identification purposes only.				







MIG TIPS TWC 1 STYLE

• Suit Tweco 1 & Lincoln Magnum 100L style MIG torches



Part No.	Description	Unit
P3-1123	Contact Tip 0.6mm (ref 11-23)	Pkt 5
P3-1130	Contact Tip 0.8mm (ref 11-30)	Pkt 5
P3-1135	Contact Tip 0.9mm (ref 11-35)	Pkt 5
P3-1140	Contact Tip 1.0mm (ref 11-40)	Pkt 5
P3-1145	Contact Tip 1.2mm (ref 11-45)	Pkt 5
The products advertised above are o products are not original Tweco. Any	riginal Weldclass products only. Weldclass is not affiliated in any way v references to Tweco trade names and/or part numbers are for identific	vith Tweco, and the ation purposes only.

MIG TIPS TWC 2/4 STYLE

- Quality contact tips for Tweco 2 & 4 style MIG torches
- Heavy Duty Style with Thicker Body for Longer Life



Part No.	Description	Unit	
P3-1430	Contact Tip Std 0.8mm (ref 14-30)	Pkt 5	
P3-14H35	Contact Tip H/D 0.9mm (ref 14H-35)	Pkt 5	
P3-14H40	Contact Tip H/D 1.0mm (ref 14H-40)	Pkt 5	
P3-14H45	Contact Tip H/D 1.2mm (ref 14H-45)	Pkt 5	
P3-14H52	Contact Tip H/D 1.2mm Alu/Flux- Core (14H-52)	Pkt 5	
P3-14H116	Contact Tip H/D 1.6mm (ref 14H-116)	Pkt 5	
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Tweco, and the products are not original Tweco. Any references to Tweco trade names and/or part numbers are for identification purposes only.			

MIG TIPS TWC 2/4 STYLE - TAPERED

- Quality contact tips for Tweco 2 & 4 style MIG torches
- Tapered ("pipeline") style



Part No.	Description	Unit
WC-TW14T35P	Contact Tip Tapered 0.9mm (ref 14T-35)	Pkt 5
WC-TW14T40P	Contact Tip Tapered 1.0mm (ref 14T-40)	Pkt 5
WC-TW14T45P	Contact Tip Tapered 1.2mm (ref 14T-45)	Pkt 5
WC-TW14T52P	Contact Tip Tapered 1.3mm (ref 14T-52)	Pkt 5
WC-TW14T116P	Contact Tip Tapered 1.6mm (ref 14T-116)	Pkt 5
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Tweco, and the products are not original Tweco. Any references to Tweco trade names and/or part numbers are for identification purposes only.		



www.weldclass.com.au









MIG TORCH SPARES BND 300 STYLE

- Suit Bernard style 400A MIG torches
- For Contact Tips, refer to "MIG Tips BND 300/400 Style"

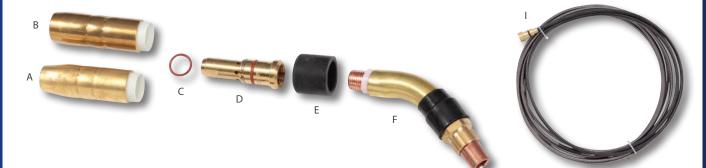

Part No.	Description	REF	Unit
WC-BE4323P	Cap - Rubber (ref BE4323)	E	Pkt 2
3-1780006	Handle Set	G	Each
P3-43115	Liner - Steel 0.9-1.2mm (ref 43115)	Ι	Pkt 1
P3-43215	Liner - Steel 1.2-1.6mm (ref 43215)	Ι	Pkt 1
P3-4786	Neck / Body Tube (ref BE4786)	F	Pkt 1
P3-4392	Nozzle 13mm (ref BE4392)	Α	Pkt 2
P3-4391	Nozzle 16mm (ref BE4391)	В	Pkt 2
WC-BE7126P	O-Ring for Head Assy (ref BE7126)	С	Pkt 2
WC-BE4335P	Tip Holder / Head Assy (ref BE4335)	D	Pkt 2
3-5662	Trigger	Н	Each
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Bernard, and the products are not original Bernard. Any references to Bernard trade names and/or part numbers are for identification purposes only.			



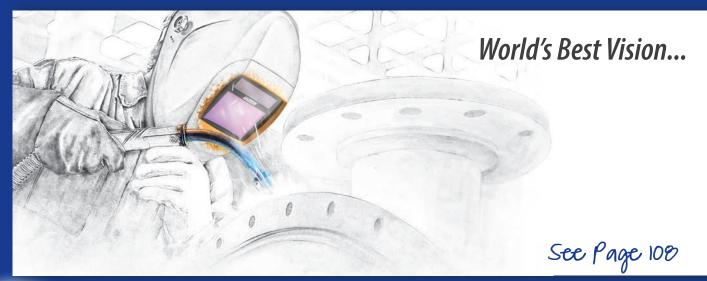





MIG TORCH SPARES BND 400 STYLE

• Suit Bernard style 400A MIG torches

A

В

• For Contact Tips, refer to "MIG Tips BND 300/400 Style"

Part No.	Description	REF	Unit
WC-BE4423P	Cap - Rubber (ref BE4423)	E	Pkt 2
3-1780006	Handle Set (>2015 Model)	G	Pkt 1
P3-44115	Liner - Steel 0.9-1.2mm (ref 44115)	Ι	Pkt 1
P3-4790	Neck / Body Tube (ref BE4790)	F	Pkt 1
P3-4492	Nozzle 14mm (ref BE4492)	Α	Pkt 2
P3-4491	Nozzle 19mm (ref BE4491)	В	Pkt 2
WC-BE7127P	O-Ring for Head Assy (ref BE7127)	С	Pkt 2
WC-BE4435P	Tip Holder / Head Assy (ref BE4435)	D	Pkt 2
3-5662	Trigger (>2015 Model)	Н	Each
The products advertised above are original Weldclass products only. Weldclass is not affiliated in any way with Bernard, and the products are not original Bernard. Any references to Bernard trade names and/or part numbers are for identification purposes only.			



MIG TIPS BND 300/400 STYLE

- Bernard style Contact Tips suit 300A & 400A torches
- Twist-Lock Style



Part No.	Description	Unit
P3-7488	Contact Tip 0.8mm (ref BE7488)	Pkt 5
P3-7489	Contact Tip 0.9mm (ref BE7489)	Pkt 5
P3-7496	Contact Tip 1.0mm (ref BE7496)	Pkt 5
P3-7490	Contact Tip 1.2mm (ref BE7490)	Pkt 5
P3-7498	Contact Tip 1.2mm Alu/Flux-Core (ref 7498)	Pkt 5
P3-7491	Contact Tip 1.6mm (ref BE7491)	Pkt 5
The products advertised above an roducts are not original Bernard.	re original Weldclass products only. Weldclass is not affiliated in any way with Any references to Bernard trade names and/or part numbers are for identifica	Bernard, and the stion purposes only.





TEFLON LINERS FOR ALUMINIUM UNIVERSAL SERIES

- For Aluminium Wire
- Suits almost any MIG torch: Supplied with fittings to suits all common torch connections: Binzel/Euro, Tweco/ Bayonet & Bernard/QD/EZ.
- Made from Graphite ('Carbon-Teflon') material: Much harder than standard Teflon providing longer wear life and smoother wire-feeding
- · Supplied with Brass Neck Liner
- Suits all lengths of MIG torches up to 5m: Simply cut to correct length

Part No.	Description	Unit
P3-CTUL09	For 0.9/1.0/1.2mm Aluminium Wire Suit Torches up to 5m Long	Each
P3-CTUL12	For 1.2/1.6mm Aluminium Wire Suit Torches up to 5m Long	Each

Many liners in one - Save time & hassle! Long lasting Carbon-Tetlon material.

TEFLON LINERS FOR ALUMINIUM SUIT LONG TORCHES

- For Aluminium Wire
- Suit Torches with Euro Style Connection
- Suitable for Torches up to 10m Long, especially Push-Pull Torches
- Made from Graphite ('Carbon-Teflon') style material: Much harder than standard Teflon providing longer wear life and smoother wire-feeding
- Supplied with Brass Neck Liner

Part No.	Description	Unit
P3-CTL09/11	For 0.9/1.0/1.2mm Aluminium Wire Suit Torches up to 10m Long	Each
P3-CTL12/11	For 1.2/1.6mm Aluminium Wire Suit Torches up to 10m Long	Each


Ideal for Push-Pull Torches!





EURO CONNECTOR KIT & PARTS

Kits & components to suit common Euro-style MIG torch connections

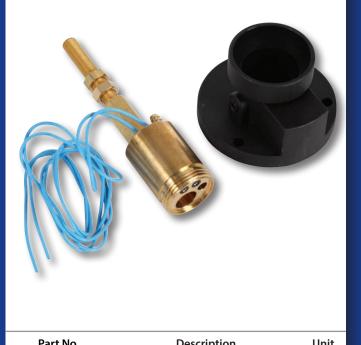

Part No.	Description	Unit
3-BGAK	Euro Connector Kit (For Front of Welding Machine)	Kit
3-BBGT	Guide Tube - For Steel Wire	Each
WC-02434	O-Ring for Euro Gas Nipple	Each
3-BPH	Plastic Housing	Each
3-BTB	Threaded Rod	Each



NECK LINERS

• Brass Neck Liners to suit Teflon and Carbon Teflon Liners

Part No.	Description	Unit
3-BNL	Neck Liner (Brass) Suit 0.9-1.2mm Liner	Each
3-BNL12	Neck Liner (Brass) Suit 1.2-1.6mm Liner	Each







A quick look at...

Weldclass 'UNIVERSAL SERIES' TIG TORCHES

Not quite sure what TIG Torch fits your machine? Or what type of Torch head you prefer? No problem! The Promax Universal TIG Torch range offer an All-in-one package that saves hassle, time & money...





TIG TORCHES PROMAX UNIVERSAL SERIES 9/17 - WITH VALVE 2PC All-In-One TIG Torch - Multiple Options in One Package Save Time, Hassle & Money Modern Ergonomic Handle with Ball Joint to allow easy handling of the torch **INCLUDES:** • Torch Heads - Includes: 17 series (150 amp) & 9 Series (100 amp), in both Rigid & Flexible INDICATIVE PRICE 3-TTU2917V/4 · Valved style heads for use with most ·00 standard inverter welders Excl GST • 2 Piece style Cable - Includes Small & Large Cable For your nearest Distributor Connectors, to fit to most welders Phone 1300 784 200 · Parts kits & tungsten electrodes "ready to weld" rices are indicative only and may vary depending on volumes, freight cost, models/options & other factors · Protective Cable Sheath Fitted Unit Part No. Description Torch Kit 4m C/w: 9V/9FV/17V/17FV 3-TTU2917V/4 Each Heads & 1025/3550 Connectors Torch Kit 8m C/w: 9V/9FV/17V/17FV 3-TTU2917V/8 Each Heads & 1025/3550 Connectors

TIG TORCHES PROMAX UNIVERSAL SERIES 26 - WITH VALVE 2PC

- All-In-One TIG Torch Multiple Options in One Package
- Save Time, Hassle & Money
- Modern Ergonomic Handle with Ball Joint to allow easy handling of the torch

INCLUDES:

- Torch Heads Includes: 26 series (200amp), in both Rigid & Flexible
- Valved style heads for use with most standard inverter welders
- 2 Piece style Cable Includes Small & Large Cable Connectors, to fit to most welders
- Parts kits & tungsten electrodes "ready to weld"
- · Protective Cable Sheath Fitted

Part No.	Description	Unit
3-TTU226V/4	Torch Kit 4m C/w: 26V/26FV Heads & 1025/3550 Connectors	Each
3-TTU226V/8	Torch Kit 8m C/w: 26V/26FV Heads & 1025/3550 Connectors	Each





TIG TORCHES PROMAX UNIVERSAL SERIES WITH SWITCH

- All-In-One TIG Torch Multiple Options in One Package
- Save Time, Hassle & Money
- Modern Ergonomic Handle with Ball Joint to allow easy handling of the torch

INCLUDES:

- Torch Heads Rigid & Flexible
- Fitted with Trigger Switch (on/off) for use with TIG welders that have a trigger function
- Connectors Includes Small 10-25 & Large 35-50
 Connectors, to fit to most welders
- Parts kits & tungsten electrodes "ready to weld"
- Gas connection: Includes male & female 5/8 UNF fittings, to fit to welding machine
- Trigger Connection: Trigger wires fitted & ready to connect to electrical plug (electrical plug not included, this will be specific to the model & make of the welder - if replacing an old torch, the old plug may be able to be used)
- 2 Piece style Cable
- Protective Cable Sheath Fitted

Part No.	Description	Unit
3-TTU217T/4	17 ((150AMP) Torch Kit 4M	Each
3-TTU226T/4	26 (200AMP) Torch Kit 4M	Each
3-TTU226T/8	26 (200AMP) Torch Kit 8M	Each

TIG TUNGSTENS RE4 (RARE-EARTH STYLE) AC/DC

- "All metal" Tungsten Suitable for DC & AC TIG welding
- For DC welding of mild steel, stainless steel, copper and chrome molly
- For AC TIG welding of: Aluminium alloys and Aluminium bronze
- Does Not contain radioactive elemets = No special safeguards required for use, storage or transport
- Maintains tip geometry, Reliable arc striking, Low burn off rate, Long service life and Smooth/stable arc
- Contains additives/combinations of "rare-earth" oxides, scientifically balanced to provide optimum arc characteristics and wear life
- Compared to other tungsten formulas: Requires less energy to start, Runs cooler, Greater longevity, Greater current capacity (ability to use a smaller-diameter electrode for the same job or use higher current for a similar-sized electrode)

Part No.	Description	Unit
WC-05192	1.6mm Purple Tip	Pkt 10
WC-05193	2.4mm Purple Tip	Pkt 10
WC-05194	3.2mm Purple Tip	Pkt 10

The high performance and hazard-free "all-metal" tungsten!





TIG TORCH BODIES TIG PARTS DIAGRAM 9/20 SERIES 9 SERIES • Suit 9 series **TIG torches** Back Cap Part No. REF Unit Description 9 Standard (No Valve) 9F Flexible (No Valve) 9V Valved P3-TB9 А Pkt 1 P3-TB9F P3-TB9V Pkt 1 Pkt 1 B P3-TB9FV 9FV Flexible Valved D Pkt 1 Ο Torch Collet **TIP BACK CAPS** Head **9/20 SERIES** Suit 9 & 20 series TIG torches 'Gas Lens' Collet Body Standard Collet Body Ceramic 'Gas Lens' Cup (Nozzle) Standard Ceramic REF Part No. Description Unit 'Alumina' WC-41V24P WC-41V35P WC-41V33P Long (ref 41V24) Medium (ref 41V35) Short (ref 41V33) Pkt 2 Pkt 2 Pkt 2 Cup (Nozzle) AB





TIG COLLETS 9/20 SERIES

• Suit 9 & 20 series TIG torches




TIG 'GAS LENS' COLLET BODIES 9/20 SERIES

- Suits 9 & 20 series TIG torches
- Gas Lens style, for smooth gas flow & even gas shield



Part No.	Description	Unit
WC-45V43P	1.6mm (ref 45V43)	Pkt 2
WC-45V44P	2.4mm (ref 45V44)	Pkt 2
WC-45V45P	3.2mm (ref 45V45)	Pkt 2



Part No.	Description	Unit
P3-13N27	1.6mm (ref 13N27)	Pkt 2
P3-13N28	2.4mm (ref 13N28)	Pkt 2
P3-13N29	3.2mm (ref 13N29)	Pkt 2

TIG CERAMIC 'GAS LENS' CUPS 9/20 SERIES

- Suits 9 & 20 series TIG torches
- Sizes shown refer to the ID of the cup (at gas outlet end)



Part No.	Description	REF	Unit
WC-53N58P	# 4 6.4mm (ref 53N58)		Pkt 2
WC-53N59P	# 5 7.9mm (ref 53N59)	5	Pkt 2
WC-53N60P	# 6 9.5mm (ref 53N60)	6	Pkt 2
WC-53N61P	# 7 11.1mm (ref 53N61)	7	Pkt 2
WC-53N61SP	# 8 12.7mm (53N61S)	8	Pkt 2

TIG CERAMIC 'ALUMINA' CUPS 9/20 SERIES

- Suit 9 & 20 series TIG torches
- Sizes shown refer to the ID of the cup (at gas outlet end)



Part No.	Description	REF	Unit
P3-13N08	# 4 6.4mm (ref 13N08)	4	Pkt 2
P3-13N09	# 5 7.9mm (ref 13N09)	5	Pkt 2
P3-13N10	# 6 9.5mm (ref 13N10)	6	Pkt 2
P3-13N11	# 7 11.1mm (ref 13N11)	7	Pkt 2
P3-13N12	# 8 12.7mm (ref 13N12)	8	Pkt 2





TIG TORCH BODIES TIG PARTS DIAGRAM 17/26 SERIES 17 SERIES • Suit 17 series TIG torches Back Cap Description REF Part No. Collet 17 Standard (No Valve) 17F Flexible (No Valve) 17V Valved P3-TB17 А P3-TB17F P3-TB17V B P3-TB17FV 17FV Flexible Valved D Torch Head **TIG TORCH BODIES 26 SERIES** Suit 26 series **TIG torches** 'Gas Lens' Collet Body Standard Ē T Collet Body Ceramic 'Gas Lens' Cup (Nozzle) Standard Ceramic 'Alumina' Cup Part No. Description REF (Nozzle) 26 Standard (No Valve) 26F Flexible (No Valve) 26V Valved P3-TB26 A P3-TB26F P3-TB26V B P3-TB26FV 26FV Flexible Valved D



Unit

Pkt 1

Pkt 1 Pkt 1 Pkt 1 Pkt 1

Unit

Pkt 1

Pkt 1 Pkt 1

Pkt 1




TIG BACK CAPS 17/18/26 SERIES



Part No. Description REF Unit WC-57Y02P Long (ref 57Y02) A Pkt 2 WC-57Y05P Medium (ref 57Y05) B Pkt 2 WC-57Y04P Short (ref 57Y04) C Pkt 2

TIG COLLETS 17/18/26 SERIES

• Suit 17, 18 & 26 series TIG torches



Part No.	Description	Unit
P3-10N23	1.6mm (ref 10N23)	Pkt 2
P3-10N24	2.4mm (ref 10N24)	Pkt 2
P3-10N25	3.2mm (ref 10N25)	Pkt 2

TIG COLLET BODIES 17/18/26 SERIES

• Suit 17, 18, & 26 series TIG torches



Unit	Part No.	Description	Unit
Pkt 2	P3-10N31	1.6mm (ref 10N31)	Pkt 2
Pkt 2	P3-10N32	2.4mm (ref 10N32)	Pkt 2
Pkt 2	P3-10N28	3.2mm (ref 10N28)	Pkt 2

TIG 'GAS LENS' COLLET BODIES 17/18/26 SERIES

- Suit 17, 18 & 26 series TIG torches
- Gas Lens style, for smooth gas flow & even gas shield



Part No.	Description	Unit
WC-45V25P	1.6mm (ref 45V25)	Pkt 2
WC-45V26P	2.4mm (ref 45V26)	Pkt 2
WC-45V27P	3.2mm (ref 45V27)	Pkt 2





TIG CERAMIC 'ALUMINA' CUPS 17/18/26 SERIES

- Suit 17, 18 & 26 series TIG torches
- Sizes shown refer to the ID of the cup (at gas outlet end)

TIG CERAMIC 'GAS LENS' CUPS 17/18/26 SERIES

- Suits 17, 18 & 26 series TIG torches
- Sizes shown refer to the ID of the cup (at gas outlet end)




Part No.	Description	REF	Unit
P3-10N50	# 4 6.4mm (ref 10N50)	4	Pkt 2
P3-10N49	# 5 7.9mm (ref 10N49)	5	Pkt 2
P3-10N48	# 6 9.5mm (ref 10N48)	6	Pkt 2
P3-10N47	# 7 11.1mm (ref 10N47)	7	Pkt 2
P3-10N46	# 8 12.7mm (ref 10N46)	8	Pkt 2
P3-10N45	#10 15.8mm (ref 10N45)	10	Pkt 2



Part No.	Description	REF	Unit
WC-54N18P	# 4 6.4mm (ref 54N18)		Pkt 2
WC-54N17P	# 5 7.9mm (ref 54N17)	5	Pkt 2
WC-54N16P	# 6 9.5mm (ref 54N16)	6	Pkt 2
WC-54N15P	# 7 11.1mm (ref 54N15)	7	Pkt 2
WC-54N14P	# 8 12.7mm (ref 54N14)	8	Pkt 2
WC-53N88P	#10 15.8mm (ref 53N88)	10	Pkt 2

TIG INSULATORS / GASKETS 17/18/26 SERIES

• Suitable for 17/18/26 series TIG torches




Part No.	Description	Unit
WC-187P	Gasket for Back Cap 17/18/26 (ref 187)	Pkt 2
WC-54N01P	Gasket for 'Gas Lens' Cups 17/18/26 (54N01)	Pkt 2





A quick look at...

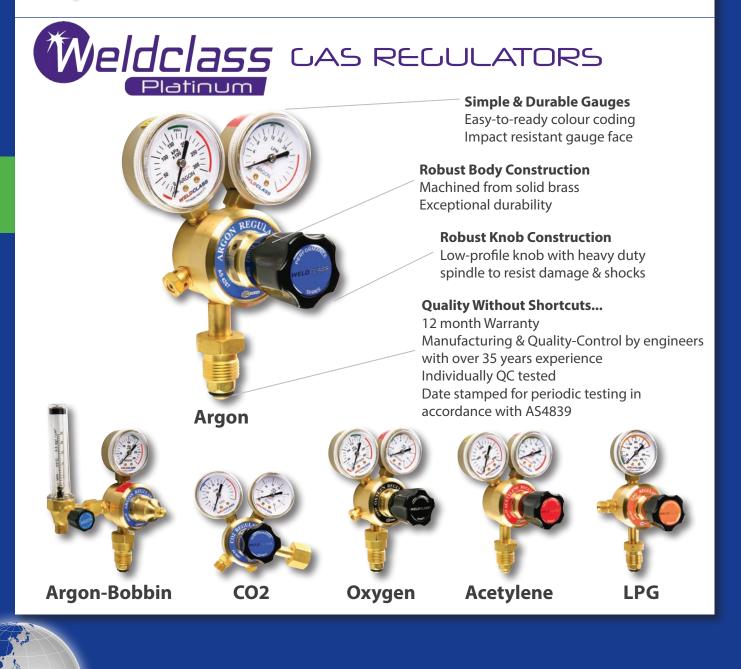



OXY KITS PLATINUM SERIES OXY/ACETYLENE

- Heavy duty Platinum series oxygen/acetylene cutting, welding and brazing kits
- 12 month warranty on regulators, blowpipe handle and cutting attachment
- Bonus combination circle/roller guide
- Robust stainless steel tool box with plenty of space

KIT CONTAINS:

Oxygen Regulator, Acetylene regulator, Blowpipe handle, Cutting Attachment, Brazing Mixer, 3 Brazing Tips, 3 Cutting Tips, 10m Hose Set, Tip Cleaners, Flint Lighter, Combination Circle/Roller Guide, Shade 5 Oxy Specs, Multipurpose spanner. Model 4-OXACK/FRT also includes set of 4 Flashback Arrestors

Part No.	Description	Unit	_
4-OXACK/FRT	PLATINUM Series with Flashback Arrestors	Kit	
4-OXACK	PLATINUM Series	Kit	

OXY KITS PLATINUM SERIES OXY/LPG

- Heavy duty Platinum series Oxygen/LPG cutting and brazing kits
- 12 month warranty on regulators, blowpipe handle and cutting attachment
- · Bonus combination circle/roller guide
- Robust stainless steel tool box with plenty of space

KIT CONTAINS:

Blowpipe handle, cutting attachment, mixer, Oxygen regulator, LPG regulator, 3 brazing tips ,3 cutting tips,10m hose set, tip cleaners, flint lighter, combination circle/roller guide, shade 5 oxy specs and multipurpose spanner. Model 4-OXLPK/FRT also includes set of 4 Flashback Arrestors

Description	Unit	
PLATINUM Series with Flashback Arrestors	Kit	
PLATINUM Series	Kit	
	PLATINUM Series with Flashback Arrestors	PLATINUM Series with Flashback Kit Arrestors







REGULATORS ARGON TWIN-GAUGE STYLE (MIG/TIG)

- Heavy Duty Platinum Series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available User friendly colour coded
- gauges
- For MIG or TIG use
- 0-28 L/min flow rate



Part No.	Description	Unit
4-AR1	PLATINUM Series 0-28L/min	Each

REGULATORS ARGON BOBBIN STYLE (MIG/TIG)

- Heavy Duty Platinum Series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available
- User friendly colour coded gauge
- For MIG or TIG use
- Available in 0-15 and 0-25 L/min flow rate



Part No.	Description	Unit
4-ABFR15	PLATINUM Series 0-15L/min	Each
4-ABFR25	PLATINUM Series 0-25L/min	Each

FLOWMETERS

- Fit to Bobbin stle regulators
- Also used on pipeline systems



Part No.	Description	Unit
4-BF15	PLATINUM Series 0-15L/min (Flowmeter Only)	Each
4-BF25	PLATINUM Series 0-25L/min (Flowmeter Only)	Each







REGULATORS REGULATORS NITROGEN CO2 Heavy Duty Platinum Series 12 month warranty • Solid brass body and bonnet • Spare parts available • 12 month warranty • 0-3400KPa (500psi) output • Spare parts available • User friendly colour coded gauges • For MIG or TIG use • 0-28 L/min flow rate Part No. Part No. Unit Description Unit Description 4-CO2R1 4-S200NTN PLATINUM Series 0-28L/min Each 0-3440kpa / 0-500psi T50 Inlet Each

GAS FLOW TESTER

- Quickly & Easily Diagnose Gas Flow Issues
- For MIG & TIG Torches Measures gas flow at MIG or TIG nozzle
- Great for locating gas leaks or restrictions



Part No.	Description	Unit
P4-GFT	Argon or CO2	Each







REGULATORS OXYGEN

- Heavy Duty Platinum Series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available
 User friendly colour coded gauges
- 0-1000 Kpa output

Part No.

4-OXR1



Each

REGULATORS ACETYLENE

- Heavy Duty Platinum Series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available
- Performance series
- User friendly colour coded gauges
- 0-150KPa output



Part No.	Description	Unit
4-ACR1	PLATINUM Series 0-150 Kpa	Each

REGULATORS LPG/PROPANE

- Heavy Duty Platinum Series
- Solid brass body and bonnet
- 12 month warranty
- Spare parts available
- User friendly colour coded
 gauges
- 0-300KPa output For cutting, heating and
- For cutting, neating and brazing



Part No.	Description	Unit
4-LPR1	PLATINUM Series 0-300 Kpa	Each

PLATINUM Series 0-1,000 Kpa







FLASHBACK ARRESTORS

- Conform to AS4603-1999
- · Individually flashback, flow & leak tested
- Certified to EN730
- Made in France
- Thermal cut off valve for protection against sustained flashback (on Regulator-end Models)

Conforms to AS4603 Made in Europe

Part No. Description Uni	it
P4-FBARF2 Regulator Mount Fuel Gas (Acetylene/LPG) - AS4603 Eac	:h
P4-FBARO2 Regulator Mount Oxygen - AS4603 Eac	h
P4-FBATF Torch Mount Fuel Gas Eac	:h
P4-FBATO Torch Mount Oxygen - AS4603 Eac	h



QUICK COUPLINGS FOR OXY GEAR

- · Allows equipment to be quickly and safely dismantled/assembled
- · Fast change between hoses and different torches
- Made in France
- Complies with ISO7289 / EN561 Standards
- Automatically shuts off when disconnected, Patented locking mechanism prevents accidental disconnection
- Use for Oxy, Acetylene, LPG, MIG and TIG gas

• (• Ose for Oxy, Acetylene, LFG, Mig and Tig gas				
F	Part No.	Description	Unit		
F	P4-RQCF	Regulator Mount - Coupler - Fuel Gas (Acetylene/LPG)	Each		
Р	4-RQCO	Regulator Mount - Coupler - Oxy- gen or Argon	Each		
F	P4-TQCF	Torch Mount - Coupler - Fuel Gas (Acetylene/LPG)	Each		
P	P4-TQCO	Torch Mount - Coupler - Oxygen or Argon	Each		
F	P4-RQPF	Regulator Mount - Pin Only - Fuel Gas (Acetylene/LPG)	Each		
Р	4-RQPO	Regulator Mount - Pin Only - Oxy- gen or Argon	Each		
F	P4-TQPF	Torch Mount - Pin Only - Fuel Gas (Acetylene/LPG)	Each		
P	P4-TQPO	Torch Mount - Pin Only - Oxygen or Argon	Each		
		-			



Regulator Mount

Torch Mount









DIAGRAM CYLINDER TO TORCH

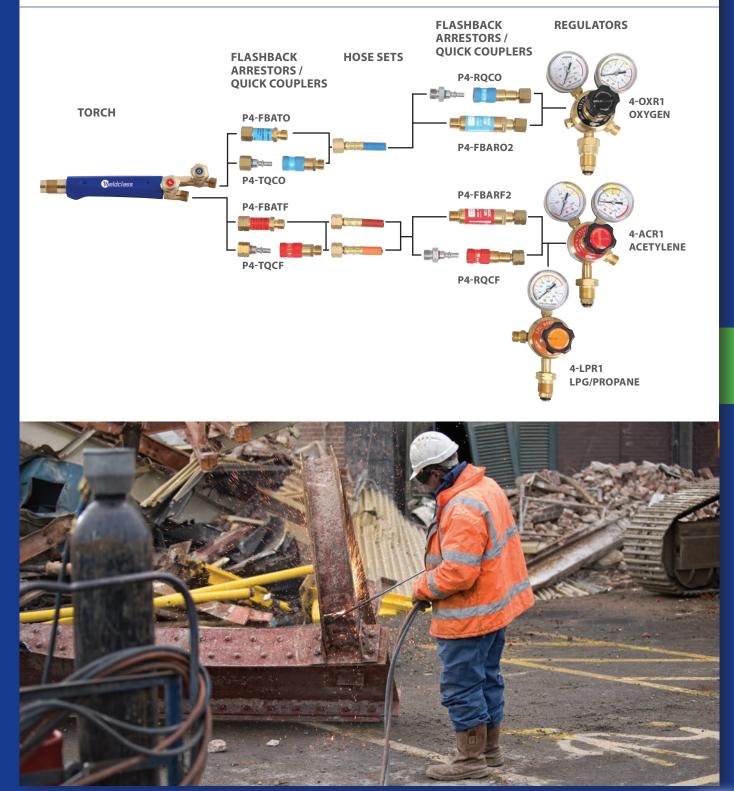







DIAGRAM - TORCH TO TIP CUTTING & GOUGING P4-BP | BLOW PIPE HANDLE P4-CA | CUTTING ATTACHMENT Weldclass 0 **OXY/ACETYLENE** OXY/LPG A P4-T41_ | CUTTING B P4-41_GB | BENT GOUGING C P4-4132GS | STRAIGHT GOUGING D P4-T44_ | CUTTING D Ε E P4-4432GS | STRAIGHT GOUGING F P4-44_GB | BENT GOUGING







DIAGRAM - TORCH TO TIP HEATING & BRAZING

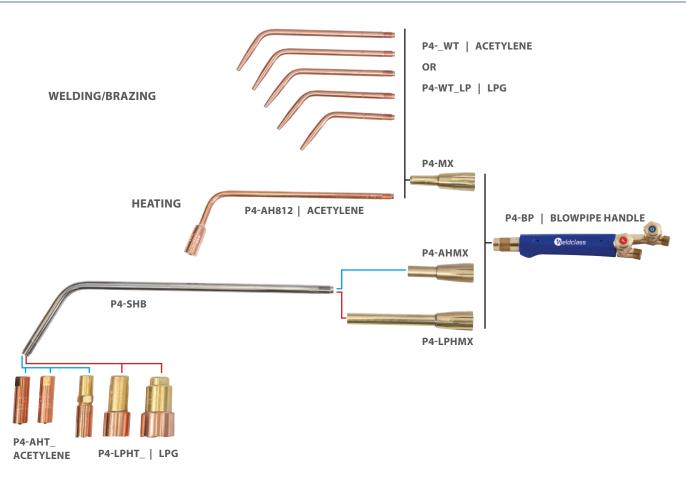







BLOWPIPE HANDLE PLATINUM SERIES

- Heavy duty Platinum Series
- Proven Quality, Robust Long-Life Design
- Dual-Stage Valves for quick and precise adjustment from fine work through to heavy cutting and heating
- Superior Valve Design with Tension System to Prevent Accidental Adjustment
- 12 Month Warranty
- Suitable for Oxygen/LPG and Oxygen/Acetylene gases
- Fits to Cutting Attachment (Part no P4-CA) or Brazing/ Heating Mixers

CUTTING ATTACHMENT PLATINUM SERIES

- Heavy duty Platinum Series
- Proven Quality, Long-Life and Robust design
- Stainless-Steel Lever
- Superior Valve Design with Tension System to Prevent Accidental Adjustment
- 12 Month Warranty

Part No.

P4-CA

Each

- Suitable for Oxygen/LPG and Oxygen/Acetylene gases
- Fits to common blowpipe handle (part no. P4-BP)
- Takes standard Type 41 (Oxy/Acetylene) or Type 44 (Oxy/ LPG) style cutting & gouging tips

Description



P4-BP PLATINUM Series

ries

HEATING BARRELS/TUBES

PLATINUM Series

- MIXERS FOR BRAZING & HEATING
- Fits to standard Blowpipe Handle (part no P4-BP)
- P4-MX Standard Mixer: Use with brazing/welding tips
- P4-AHMX Heating Mixer: Use with Heating Barrel/Tube and Oxy/Acet or Oxy/LPG heating tips up to size 2
- P4-LPHMX Hi-Flow Heating Mixer: Use with Heating Barrel/Tube and Oxy/LPG heating tips from size 3 upwards



Part No.	Description	Unit
P4-AHMX	Heating - Oxy/Acet or Oxy/LPG (Takes Heating Tube/Barrel)	Each
P4-LPHMX	Heating - Oxy/LPG Hi-Flow (Takes Heating Tube/Barrel)	Each
P4-MX	Brazing - Oxy/Acet or Oxy/LPG (Takes T551/554 Brazing Tips)	Each
	J	

STAINLESS-STEEL

- Stainless-Steel for durability and strength
- Suitable for Oxygen/LPG and Oxygen/Acetylene gases
 Connect to Heating mixer Use with P4-AHMX or P4-
- LPHMX mixers
- Takes Oxy/Acetylene or Oxy/LPG Heating Tips



www.weldclass.com.au

Unit

Each



CUTTING TIPS T41 OXY/ACETYLENE

- Proven Consistent Quality, Long-Life
 Design
- Standard Shape Fits Common Roller/ Circle Guides
- Fits to standard cutting attachment (P4-CA)
- Use with oxygen/acetylene




CUTTING TIPS

T44 OXY/LPG

- Proven Quality, Long-Life Design
- Standard Shape Fits Common Roller/Circle Guides
- Fits to standard cutting attachment (P4-CA)
- Use with Oxygen/LPG



Part No.	Description	Unit	Part No.	Description	Unit
P4-T416	Size 6 (1-6mm)	Each	P4-T446	Size 6 (3-6mm)	Each
P4-T418	Size 8 (6-10mm)	Each	P4-T448	Size 8 (6-12mm)	Each
P4-T4112	Size 12 (10-20mm)	Each	P4-T4412	Size 12 (12-20mm)	Each
P4-T4115	Size 15 (20-75mm)	Each	P4-T4415	Size 15 (20-75mm)	Each
P4-T4120	Size 20 (75-125mm)	Each	P4-T4420	Size 20 (75-125mm)	Each
P4-T4124	Size 24 (125-200mm)	Each	P4-T4424	Size 24 (125-200mm)	Each
P4-T4132	Size 32 (200-275mm)	Each	P4-T4432	Size 32 (200-275mm)	Each
				· · · · ·	

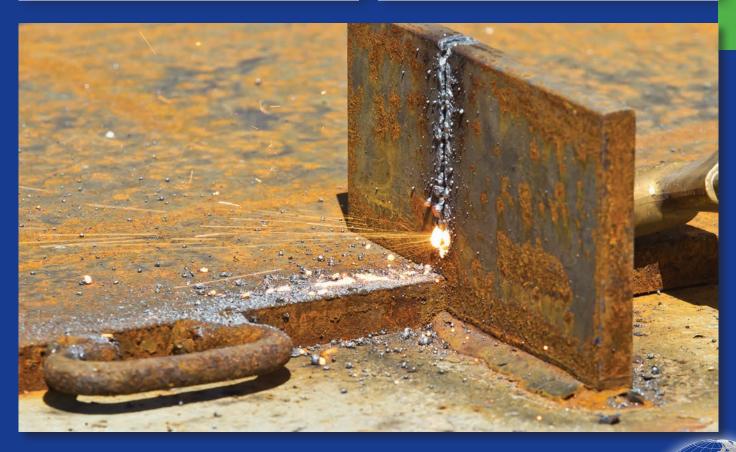





CUTTING TIPS T51 OXY/ACETYLENE'3-SEAT'

- 3 seat design suits most straight line and profile cutting machine torches and some one piece hand held cutting torches
- Use with oxygen/acetylene



Part No.	Description	Unit
P4-T510	Size 0 (5-10mm)	Each
P4-T5100	Size 00 (0-5mm)	Each
P4-T511	Size 1 (10-15mm)	Each
P4-T512	Size 2 (15-30mm)	Each
P4-T513	Size 3 (30-40mm)	Each
P4-T514	Size 4 (40-50mm)	Each
P4-T515	Size 5 (50-100mm)	Each
P4-T516	Size 6 (100-150mm)	Each
P4-T517	Size 7 (150-250mm)	Each
P4-T518	Size 8 (250-350mm)	Each

CUTTING TIPS

T54 OXY/LPG '3-SEAT'

- 3 seat design suits most straight line and profile cutting machine torches and some one piece hand held cutting torches
- Use with oxygen/LPG



Part No.	Description	Unit
P4-T540	Size 0 (5-10mm)	Each
P4-T5400	Size 00 (0-5mm)	Each
P4-T541	Size 1 (10-15mm)	Each
P4-T542	Size 2 (15-30mm)	Each
P4-T543	Size 3 (30-40mm)	Each
P4-T544	Size 4 (40-50mm)	Each
P4-T545	Size 5 (50-100mm)	Each
P4-T546	Size 6 (100-150mm)	Each
P4-T547	Size 7 (150-250mm)	Each
P4-T548	Size 8 (250-350mm)	Each

GOUGING TIPS T41 OXY/ACETYLENE

- Proven Consistent Quality, Long-Life
 Design
- Fast Metal Removal for repair of cracks, defects and weld preparation
- Available in Bent or StraightFits to cutting attachment
- Fits to cutting attachment P4-CA
 Use with Oxy/Acetylene
- cracks,

T44 OXY/LPG

GOUGING TIPS

- Proven Consistent Quality, Long-Life Design
- Fast Metal Removal for repair of cracks, defects and weld preparation
- Available in Bent or Straight
- Fits to cutting attachment
- P4-CA
- Use with Oxy/LPG



Description	Unit	Part No.	Description	Unit
Size 32GB Bent	Each	P4-4432GB	Size 32GB Bent	Each
Size 32GS Straight	Each	P4-4432GS	Size 32GS Straight	Each
Size 48GB Bent	Each	P4-4448GB	Size 48GB Bent	Each



Part No. P4-4132GB P4-4132GS P4-4148GB



BRAZING TIPS OXY/ACETYLENE

- · Quality swaged copper brazing/welding tips
- For use with oxygen/acetylene
- Suitable for brazing and fusion welding



BRAZING OXY/LPG

- Quality swaged copper brazing tips
- For use with oxygen/LPG
- Suitable for brazing



Part No.	Description	Unit
P4-08WT	Size 8 (0.0-2.0mm)	Each
P4-10WT	Size 10 (2.0-2.6mm)	Each
P4-12WT	Size 12 (3.2-4.0mm)	Each
P4-15WT	Size 15 (5.0-6.5mm)	Each
P4-20WT	Size 20 (8.0-10.0mm)	Each

Unit	Part No.	Description	Unit
Each	P4-08WTLP	Size 8 (0.0-2.0mm)	Each
Each	P4-10WTLP	Size 10 (2.0-2.6mm)	Each
Each	P4-12WTLP	Size 12 (3.2-4.0mm)	Each
Each	P4-15WTLP	Size 15 (5.0-6.5mm)	Each
Each	P4-20WTLP	Size 20 (8.0-10.0mm)	Each

HEATING TIP OXY/ACETYLENE W/TUBE

- Quality swaged copper heating tip
- For use with oxygen/acetylene
- Fits to standard brazing mixer (P4-MX)
- For light to medium heating applications









HEATING TIPS OXY/ACETYLENE

- · Precision Machined to help Prevent flashback & back-fire
- Use with oxygen/acetylene
- Connects to P4-SHB Tube/Barrel

OPERATOR INFO:

- Heating with Oxy/Acetylene has limitations and hazards. Care must be taken to ensure that the maximum draw-off consumption rate of acetylene is not exceeded (consult your gas supplier for details). For this reason, Acetylene tips are available only up to size 2.
- Where possible, Weldclass recommends that Oxy/LPG be used in preference to Oxy/Acetylene. LPG is safer and less prone to flashback or backfire, and larger tip sizes are available for heavy heating. LPG is also often only a fraction of the cost of Acetylene.

Part No.	Description	Unit
P4-AHT1	Size 1 (8 x 12) - Connects to P4-SHB Tube/Barrel	Each
P4-AHT2	Size 2 (12 x 12) - Connects to P4-SHB Tube/Barrel	Each

HEATING TIPS OXY/LPG

- Precision Machined to Prevent flashback & back-fire
- For use with Oxy/LPG
- Connects to P4-SHB Tube/Barrel

OPERATOR INFO:

- Tip size 1 can be used with 'standard' heating mixer (P4-AHMX).
- Tip sizes 2 & above must be used with 'Hi-Flow' heating mixer (P4-LPHMX)

Description	Unit
Size 1 (18 x 12) - Connects to P4-SHB Tube/Barrel	Each
Size 2 (36 x 12) - Connects to P4-SHB Tube/Barrel	Each
Size 3 (48 x 12) - Connects to P4-SHB Tube/Barrel	Each
	Size 1 (18 x 12) - Connects to P4-SHB Tube/Barrel Size 2 (36 x 12) - Connects to P4-SHB Tube/Barrel Size 3 (48 x 12) - Connects to P4-SHB



LPG BURNER/HEATING TORCHES & KITS

- Air/LPG operation requires LPG gas only (no Oxygen required)
- More Portable than Oxy/Fuel Equipment & Very Economical to Run
- Robust Construction for Industrial Applications

APPLICATION INFO:

- For Light to Medium Heating Applications that do not require the Ultra-High Temperatures of an Oxy/Fuel Flame
- Preheating before welding, Drying, Thawing, Heating Bitumen/Asphalt, Curing Concrete, Vegetation Burn-Off, Shrink-Wrapping, etc

OPERATION INFO:

- Use with Standard LPG (BBQ Cylinder) and LPG regulator
- Hose/Inlet Connection is Standard 5/8" UNF LH Thread as used on all standard Oxy/Gas Equipment

Part No.	Description	Unit
P4-LPBK1	Torch - 500mm w/ 3 Tips (25, 38, 51mm)	Each
WC-02992K	Torch Kit - 500mm w/ Regulator & 5m Hose	Kit
P4-LPBK2	Torch 800mm w/ Pilot Lever, 60mm Tip	Each
WC-02993K	Torch Kit - 800mm w/ Regulator & 10m Hose	Kit
P4-LPBT1	Tip #1 (25mm)	Each
P4-LPBT2	Tip #2 (38mm)	Each
P4-LPBT3	Tip #3 (51mm)	Each
P4-LPBT4	Tip #4 (60mm)	Each

P4-LPBK1 500mm Torch Only

\$1800° Excl GST* For your nearest Distributor Phone 1300 784 200 *Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors

INDICATIVE PRICE P4-LPBK1

WC-02992K 800mm Torch Kit W/ Regulator & 5m Hose



P4-LPBK2 800mm Torch Only INDICATIVE PRICE WC-02992K

\$329⁰⁰ Excl GST* For your nearest Distributor Phone 1300 784 200

Phone 1300 784 200 Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors



INDICATIVE PRICE P4-LPBK2

For your nearest Distributor Phone 1300 784 200 "Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors

WC-02993K 800mm Torch Kit W/ Regulator & 10m Hose





INDICATIVE PRICE WC-02993K

\$359⁰⁰ Excl GST*

For your nearest Distributor Phone 1300 784 200 *Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors





CUTTING TORCHES PLATINUM 50/70 SERIES

- 12 month warranty
- Spare parts available
- Uses 3-Seat / Type 51/54 Cutting Tips
- Cutting lever can be locked on
- Made in Europe Very Robust, Long life design

Part No.	Description	Unit
WC-05198	600mm - 180DG Straight Head	Each
WC-05197	600mm - 90DG Right-Angle Head	Each
4-CTP5/1000S	1,000mm - 180DG Straight Head	Each
4-CTP5/1000R	1,000mm - 90DG Right-Angle Head	Each



FLINT LIGHTERS


• Quality flint lighters and flint renewals



Part No.DescriptionUnitP4-SFLSingle Flint LighterEachP4-TFLTriple Flint LighterEachP4-SFRSingle Flint ReplacementsPkt 10P4-TFRTriple Flint ReplacementsPkt 5

TIP CLEANERS


- Abrasive wires remove carbon build up and loose slag from nozzles and tips
- Extra long tip cleaners are suitable for 3 seat cutting tips

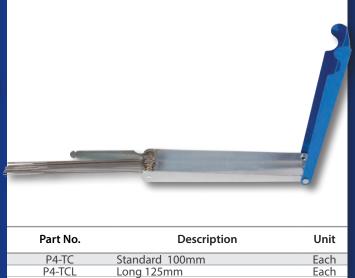






ROLLER **GUIDE**

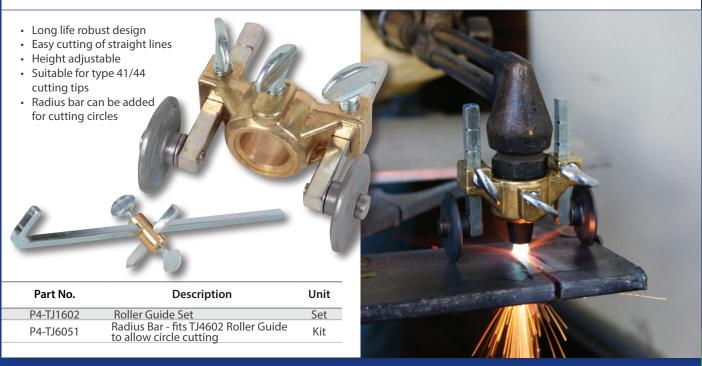

CIRCLE GUIDE

- Long life robust design
- 360 degree cutting from one position
- Height adjustable
- Cuts circles 25-730mm diameter
- Suitable for type 41/44 cutting tips
- Magnetic pivot can be used for a secure pivot point







Each

Part No.

P4-TJ1083

P4-TJ6086

TJ1083



HOSE CONNECTOR KITS CRIMP-ON

- Kit includes hose clamp, brass nut and tail
- Easy to use and quick to install (use pincers)
- Firm clamp designs prevent leaks





it
t
t
t
t
i

HOSE JOINERS SCREW-ON

Brass screw type hose joiner suitable for joining 5mm I.D. hose



Part No.	Description	Unit
4-LP265	Suit 5mm I.D. Hose	Each
P4-LP265	Suit 5mm I.D. Hose - Carded Single Pack	Pkt 1

HOSE CONNECTORS SCREW-ON

Brass screw type hose connector suitable for 5mm I.D. hose



Part No.	Description	Unit
4-LP112	Suit 5mm I.D. Hose - RH Oxy/Argon	Each
P4-LP112	Suit 5mm I.D. Hose - RH Oxy/Argon - Carded Single Pack	Pkt 1
4-LP240	Suit 5mm I.D. Hose - LH Acet/LPG	Each
P4-LP240	Suit 5mm I.D. Hose - LH Acet/LPG - Carded Single Pack	Pkt 1

HOSE JOINER KITS CRIMP-ON

- Kit includes 2x stainless steel hose clamps and a brass double end barb
- Easy to use and quick to assemble



Part No.	Description	Unit
P4-DEBK	Suit 5mm I.D. Hose	Kit
P4-DEBK10	Suit 10mm I.D. Hose	Kit





HOSE CLAMPS (1-EAR)

- Easy and quick to install (use pincers)
- One ear design



Part No.	Description	Unit
P4-HFC095/10	09.5mm ID (Before Crimping) Suit TIG Hose	Pkt 10
P4-HFC133/10	13.3mm ID (Before Crimping) Suit 5mm ID Oxy/Argon Hose	Pkt 10
P4-HFC185/10	18.5mm ID (Before Crimping) Suit 10mm ID Oxy Hose	Pkt 10

HOSE COUPLERS

• For joining and connecting hose and hose sets




Part No.	Description	Unit
4-WB34	RH Oxy/Argon	Each
P4-WB34	RH Oxy/Argon - Carded Single Pack	Pkt 1
4-WB35	LH Acet/LPG	Each
P4-WB35	LH Acet/LPG - Carded Single Pack	Pkt 1
	· · · · ·	

Y-PIECES



Y-PIECE WITH VALVES

- Valves allow each outlet to be independently opened or closed
- Saves time no need to readjust regulator to open or close gas flow

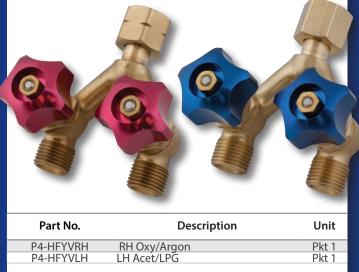





A quick look at...



www.weldclass.com.au

(1300 784 200

Machines



PLATE CUTTER TX-180

- · Light weight and portable
- Robust design
- Use with Oxy/Acetylene or Oxy/LPG
- Straight or Bevel cutting of steel plate
- Uses common track design track is interchangeable with other machines
- · Horizontal and vertical torch adjustment
- Heat deflector
- · Adjustable speed
- Forward and reverse


Part No.	Description	Unit
5-TX180/1K	TX-180 Plate Cutter Package- with Single Torch & 1.8m Track	Kit
5-TX180TTK	TX-180 2 Torch Upgrade Kit (Con- verts 1-Torch Machine to 2-Torch)	Kit
5-TX180CCA	TX-180 Circle Cutting Attachment	Each
5-SX300T	Track 1.8m suits SX-300 & TX-180 & Various Other Models	Each

PIPE CUTTER TX-21Q

- Light weight and portable
- Robust design
- Ideal for cutting steel pipes 100mm or larger
- Use with Oxy/ Acetylene or Oxy/ LPG
- · Horizontal and vertical torch adjustment
- Straight or bevel cutting
- Supplied with additional wheel flanges which bolt onto existing front wheels to increase chassis clearance for cutting smaller pipes
- · Valves located away from the torch for easy operation



Part No.	Description	Unit
5-TX21Q	TX-21Q Pipe Cutter w/Quick-Clutch & 2.4m Chain	Each
5-SX20C	Chain H/Duty Pressed-Metal 2.4m	Each
5-TX21CHAIN	Chain H/Duty Pressed-Metal 2.4m Chain Std Cast Metal 2.4m	Each

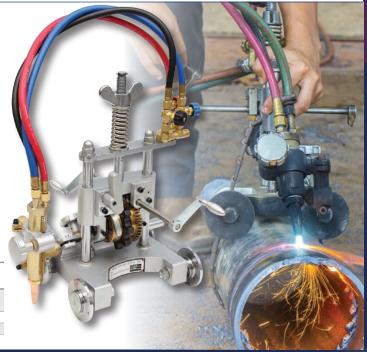



INDICATIVE PRICE

 $\mathbf{0}\mathbf{0}$

00

or your nearest Distributor Phone 1300 784 200 rices are indicative only and may var depending on volumes, freight cost, models/options & other factors



A quick look at...



Very Firm Cable Connection Withstands high cable strain Saves time, solves problems!

One-piece Solid Brass Cable Terminal & Jaw Very direct current flow from cable to job to ensure reliable earth connection & minimal amperage loss

Very Fast & Easy to Fit No cable lug required! Cable Fits Directly to Clamp using a Hex-Wrench (supplied with the clamp)

check out ...



Clamps Upto 50mm RHS or Pipe





EARTH CLAMPS STANDARD




· Copper braided shunt for improved conductivity

Suitable for MIG/STICK/TIG Welders

Part No.	Description	REF	Unit
P6-EC200	200 Amp	A	Each
P6-EC300	300 Amp	В	Each
P6-EC500	500 Amp	С	Each


EARTH CLAMPS PLATINUM EC500H

- Fast & Easy to Fit No Cable Lug Required
- Robust and Durable
- One-Piece Cable Terminal and Jaw: Very direct current flow from the cable to the job
- For all types of Welders up to 500 Amps



EARTH CLAMPS PLATINUM EC600H

- Robust and Durable
- For all types of Welders up to 600 Amps





EARTH CLAMPS PLATINUM BRASS G-STYLE

- Solid Brass Construction = Very Reliable Earth Connection & Long Service Life
- Withstands High Heat = For High Duty-Cycle Operations
- Will Not Rust = Suitable for All Environments, including
- Field Work
- Resists Spatter Build-Up
- Suitable for MIG/STICK/TIG Welders


solid brass, doesn't rust, resists spatter build-up!

Part No.	Description	Unit
P6-GC300	300 Amp (Max Opening 48mm)	Each
P6-GC500	300 Amp (Max Opening 48mm) 500 Amp (Max Opening 65mm)	Each



EARTH CLAMPS MAGNETIC

- 800 amp rating
- Withstands high heat / high duty-cycle operations
- Ideal for use on large items, sheetmetal, etc



BOOSTER CLAMPS

- 400 Amp rating
- Heavy duty copper jaw
- Rubber outer cover on jaws and hand grip
- Ideal for use with welding cable for booster lead sets



Part No.	Description	Unit
P6-BCB	400 Amp Black	Each
P6-BCR	400 Amp Red	Each



ELECTRODE HOLDERS PROMAX TWIST-LOCK



Part No.	Description	Unit
P6-TW400	400 Amp	Each
P6-TW600	600 Amp	Each





ELECTRODE HOLDERS PROMAX TONG STYLE

- Tong/Alligator style
- Industrial quality
- Suitable for lead sets for stick welders







CABLE CONNECTORS DINSE 10-25 STYLE

- Common Dinse style Twist-Lock Connector
- · Suit Smaller MIG, Stick/MMA & TIG Welders up to approx 150-200 Amps
- Maximum cable size 35mm sq
- 9mm diameter Pin



Part No.	Description	Unit
P6-1025FP	Panel-Mount Socket Female	Each
P6-1025FC	Connector Female	Each
P6-1025MC	Connector Male (9mm Pin)	Each

CABLE CONNECTORS DINSE 35-50 STYLE

- Common Dinse style Twist-Lock Connector
- Suit Most MIG, Stick/MMA & TIG Welders from approx 150-200 Amps or more
- Maximum cable size 70mm sq .
- 13mm diameter Pin



Description	Unit	Part No.	Description	Unit
lount Socket Female	Each	P6-3550FP	Panel-Mount Socket Female	Each
tor Female	Each	P6-3550FC	Connector Female	Each
tor Male (9mm Pin)	Each	P6-3550MC	Connector Male (13mm Pin)	Each

CABLE CONNECTORS ADAPTOR

- Converts From 10-25 Male To 35-50 Female
- For Fitting Cables with the larger 35-50 male connector to a machine (or another cable) with the small 10-25 female connector



			Dent Ma
Part No.	Description Unit		Part No.
	Description	•	P6-FL300
P6-MFA	Male 10-25 to Female 35-50	Each	P6-FL500

CABLE LUGS H/DUTY RE-USABLE

- Reusable lug with grub screw fitting
- Very easy to fit no crimping or soldering
- · Solid brass for long life and reliable connection
- Suitable for lead sets for MIG/STICK & TIG welders




Part No.	Description	Unit
P6-FL300 P6-FL500	300 Amp (Suits Cable up to 50mm2) 500 Amp (Suits Cable up to 70mm2)	Each Each
F 0-1 L300	Soo Amp (Suits Cable up to 70mmz)	Lach





CABLE JOINERS 500 AMP





- Commonly used on large engine-drive welders
- Compatible with other common brands
- Standard suits cable size up to 70mm²
- 95mm suits cable size 50-95mm²

Part No.	Description	Unit
WC-01499	Standard Male/female Set (Blue)	Each
WC-01493	Standard Female Only (Blue)	Each
WC-01495	Standard Male Only (Blue)	Each
WC-01867	95mm Male/female Set (Black)	Each



CABLE LUGS CRIMP STYLE

- Quality crimp style cable lugs
- Suitable for MIG/STICK/TIG Welders
- Crimp or solder onto welding cable



Part No.	Description	Unit
6-CL1610	Suit Cable 16mm2 - Hole 10mm	Each
6-CL1612	Suit Cable 16mm2 - Hole 12mm	Each
6-CL2510	Suit Cable 25mm2 - Hole 10mm	Each
6-CL2512	Suit Cable 25mm2 - Hole 12mm	Each
6-CL3510	Suit Cable 35mm2 - Hole 10mm	Each
6-CL3512	Suit Cable 35mm2 - Hole 12mm	Each
6-CL5010	Suit Cable 50mm2 - Hole 10mm	Each
6-CL5012	Suit Cable 50mm2 - Hole 12mm	Each
6-CL7010	Suit Cable 70mm2 - Hole 10mm	Each
6-CL7012	Suit Cable 70mm2 - Hole 12mm	Each
6-CL9510	Suit Cable 95mm2 - Hole 10mm	Each
6-CL9512	Suit Cable 95mm2 - Hole 12mm	Each

WELDING CABLE



- High flexibility
- Ideal for Welding lead sets & Battery charging booster lead sets

Part No.	Description	Unit
6-WC16	16mm2 (170 Amp@30%)	Mtr
6-WC16/100	16mm2 (170 Amp@30%)	Roll 100m
6-WC25	25mm2 (240 Amp@30%)	Mtr
6-WC25/100	25mm2 (240 Amp@30%)	Roll 100m
6-WC35	35mm2 (310 Amp@30%)	Mtr
6-WC35/100	35mm2 (310 Amp@30%)	Roll 100m
6-WC50	50mm2 (410 Amp@30%)	Mtr
6-WC50/100	50mm2 (410 Amp@30%)	Roll 100m
6-WC70	70mm2 (520 Amps@30%)	Mtr
6-WC70/100	70mm2 (520 Amps@30%)	Roll 100m
6-WC95	95mm2 (680 Amps@30%)	Mtr





ENGINEERS CHALK

- · Resists Breakage & Powdering No Wasting Time with Chalk that doesn't perform
- Consistently Top Quality Expect the Same quality Eve Time

- Cost Effective Non-Permenant Marking .
- For marking steel in general engineering work •
- Marks Steel, All Metals, Concrete, Masonary, etc
- Easy to use Easy to remove

Part No.

6-EC7510 6-EC755 6-EC125

seriously snap-resistant!

ge & Powdering - No Wasting Time with sn't perform op Quality - Expect the Same quality Evo Non-Permenant Marking eel in general engineering work I Metals, Concrete, Masonary, etc asy to remove SNAP-resistant !		Vertice Vertice Vertice Vertice
Description	Unit	
75 x 10 x 10mm Square -50 pcs/box 75 x 10 x 5mm Split -100 pcs/box	Box Box	
125 x 12 x 5mm Split -144 pcs/box (suit dispenser)	Box	14

CHALK DISPENSER

- Dispenser / Holder for 125mm chalk
- **Retractable Action & Pocket Clip**
- Metal design prevents chalk breakage
- Suitable for 125x12x5mm Engineers . chalk









WELDERS PENCILS SILVER-STREAK

- Superior to Chalk: Won't Rub or Burn Off
- Designed to Mark in All Conditions, Even Oily, Rusty or Wet
 Surfaces
- Highly Visible Marks Remain Visible During Cutting or Welding
- · Durable marks will not scratch or abrade metal surfaces
- Perfect for layout marking prior to cutting / welding / fitting
- · Marks: Mild steel and most metals

Julud" Silver-Streak" Welders Pencil and and a Juluda" Silver-Streak" Welders Pencil				
Part No.	Description	Unit		
P6-WPS/3	Pkt 3 (Carded)	Pkt 3		
6-WPS/12	Box 12	Box 12		



WELDERS PENCILS RED-RITER

- Highly Visible on Galvanized Steel, Stainless-Steel and Aluminium, where other markers have poor visibility
- Superior to Chalk: Won't Rub or Burn Off
- Highly Visible Marks Remain Visible During Cutting or Welding
- Low-Chlorides / Low-Corrosion Formula for peace of mind when using on Stainless Steel & other sensitive applications
- Perfect for layout marking prior to cutting / welding / fitting
- · Marks: Mild steel and most metals

	fluidad [®] Red-Riter [®] \	Neiders Pencil	MADERILLEA	Rod-Riter® Weldors Pencil، ملسله،	
Part	No.		De	scription	Unit
6-WPI	R/12	Box 12			Box 12



WELDERS PENS SILVER-STREAK

- Convenient Dispenser Pen with
 Push-Button Advance
- Superior to Chalk: Won't Rub or Burn Off
- Highly Visible Marks Remain Visible During Cutting or Welding
- Built-in Sharpener in Cap
- Durable marks will not scratch or abrade metal surfaces
- Perfect for layout marking prior to cutting / welding / fitting
- Marks: Mild steel and most metals
- Designed to Mark in All Conditions – Even Oily, Rusty or Wet Surfaces

P	

Part No.	Description	Unit
P6-SSP	Pen	Pkt 1
P6-SSR	Refills Pkt 6	Pkt

MARKER PENS TRADES-MARKER

- Smooth Writing, Non-Toxic Grease Marker in Convenient Holder
- Highly Visible on on Galvansied Steel, Stainless-Steel and Aluminium, where other markers have poor visibility
- Provides Weather and Rub-Resistant Marks.
- · Perfect on plastic, glass, metal, wood and stone

Hi-Vis M sta	arks popu nintess, alum TRADESMAR	LawyMarkat
Part No.	Descript	on Unit
P6-TMP	Pen - with 5 Refills	Pkt
P6-TMRO	Refills Pkt 6 Orange	Pkt 6
P6-TMRB	Refills Pkt 6 Black	Pkt 6





PAINT PENS PRO-LINE HP - LOW CORROSION

- Unsurpassed Writing on Challenging Surfaces: Oily, Damp, Rusty, Coated & more
- Low-Chloride / Low-Corrosion Formula = Safe for use on Stainless Steel, Alloys and other special metals and will not contribute to unwanted corrosion, degradation, or pitting from use
- · Highly Visible, Extremely Durable Permanent Paint that dries quickly and resists wearing or fading
- Made in USA
- ClipGrip Knurled Cap = Easy removal when wearing gloves or with greasy hands, will not roll on flat surfaces
- Marking Temp Range: -46c to 66c
- · Industries: Metal Fabrication, Oil/Gas, Power/Energy, Shipbuilding, Aerospace, Nuclear
- Marks On: All Metals, Masonary, Plastic, Glass, Ceramic, Rubber & More
- · 3mm Medium Bullet Tip

Best seller ! Safe, Low-corrosion & Highly Durable marks





PRO-LINE

PRO-LINE HP (man)

Part No.	Description	Unit
6-M96960/12	White	Box 12
6-M96961/12	Yellow	Box 12
6-M96963/12	Black	Box 12
6-M96962/12	Red	Box 12
6-M96965/12	Blue	Box 12
6-M96966/12	Green	Box 12
6-M96830/12	Pink	Box 12

PRO-LINE HP PAINT PENS

hy choose...

- For demanding industrial applications •
- Low-Chloride Formula for safe marking on stainless steel
- Chemical Analysis data available on request
- Firm Adhesion and Wear-Resist marking on a wide range of surfaces

check out ...











BL PAINTSTIK BLEED-THRU

· Marks bleed through solvent-based or oil-based paints.



Part No.	Description	Unit
6-M80725/12	Blue (Bleeds Thru Top-Coat of paint)	Box 12

B PAINTSTIK GENERAL PURPOSE

- Real lead-free paint in stick form; combines long-lasting durability of paint with the ease-of-use of a crayon
- Weather-resistant, UV-resistant
- Marks through oil and water
- Marks on smooth, rough, rusty or dirty surfaces
- For use on metal, wood, plastic, concrete, rubber, glass, cardboard and paper



PAINT PENS CARDED

- Real paint with valve-actuated tip
- Individually Packaged / Carded for low-volume use
- Fast-drying permanent marks on all surfaces



Part No.	Description	Unit
P6-PMB	Black Valve-Action (Carded)	Pkt 1
P6-PMR	Red Valve-Action (Carded)	Pkt 1
P6-PMW	White Valve-Action (Carded)	Pkt 1
P6-PMY	Yellow Valve-Action (Carded)	Pkt 1

INK MARKERS DURA-INK

- Black ink contains low halogens
- Ink formulated for industrial strength usage
- Low-Chlorides / Low-Corrosion Formula for peace of mind when using on Stainless-Steel & other sensitive applications
- Use on cardboard, wood, metal, paper, ceramics, cloth, glass, etc







TEMPERATURE INDICATION MARKERS THERMOMELT

- · Fast, Accurate & Cost-Effective method of n surface temperatures
- Sticks are up to 50% Larger than other bran Lasting & Stronger
- · Handy metal dispenser with pocket clip
- Made in USA

HOW DOES IT WORK?

- Initial mark appears dull & chalky. When de temperature is reached, the mark quickly m transparent-appearing liquid
- Mark can be applied prior to heating, or the touched on the job during heating

APPLICATION INFO:


· Ideal for Heat Treating, Pre-Heating, Forging Welding & more

measuring	Part No.	Description	Unit
nda Langar	6-TS050	0050c	Each
nds = Longer	6-TS075	0075c	Each
	6-TS100	0100c	Each
	6-TS125	0125c	Each
	6-TS150	0150c	Each
	6-TS175	0175c	Each
	6-TS200	0200c	Each
	6-TS225	0225c	Each
lesired	6-TS250	0250c	Each
melts to a glossy	6-TS275	0275c	Each
, see a second	6-TS300	0300c	Each
	6-TS350	0350c	Each
ne marker can be	6-TS400	0400c	Each
	6-TS450	0450c	Each
	6-TS500	0500c	Each
	6-TS550	0550c	Each
ng, Annealing,	6-TS600	0600c	Each
	6-TS650	0650c	Each
	6-TS700	0700c	Each
Thermomel	6-TS750	0750c	Each
- Will TOT STILL	6-TS800	0800c	Each
OUL CONTRACTOR OF THE OWNER OWNER OF THE OWNER	6-TS850	0850c	Each
Territoria	6-TS900	0900c	Each
	6-TS950	0950c	Each
	6-TS1000	1000c	Each
	6-TS1100	1100c	Each
	6-TS1200	1200c	Each







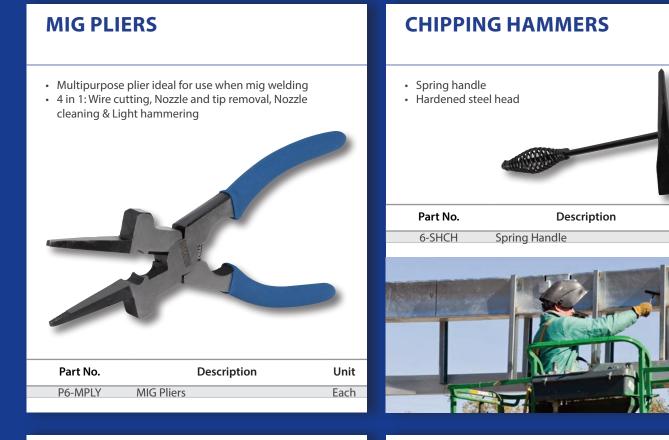

MAGNETIC SQUARE RED ARROW

- 90 and 45 degree angle holding positions
- Assists Positioning of metal plates, brackets, etc when welding



MAGNETIC SQUARE STANDARD

- 90 and 45 degree angle holding positions
- Made in Australia
- Assists Positioning of metal plates, brackets, etc when welding





Unit

Each

Available from a Distributor near You!



GOUGING TORCH PROMAX K4

- Robust, Dependable design
- Swivel head design
- 800 amp capacity
- Highly efficient metal removal, defect repairs, crack removal, edge preparation, etc
- Use with gouging carbon rods + DC power source + compressed air
- Use with 5mm 13mm gouging carbons



6-K4GT Torch Complete with 2m Cable Each




ELECTRODE OVENS

- Keeps electrodes moisture-free for optimum weld quality and electrode performance
- Round/Cylindrical Chamber keeps electrodes in better condition & avoids flux chipping, unlike Square shaped ovens where electrodes tend to roll from one corner to another and are more readily damaged
- Lightweight less than 4kg (unloaded) = Reduced strain on operator
- Variable temperature

APPLICATION INFO:

- Commonly used with Low-Hydrogen electrodes, so that low-hydrogen status is not compromised through moisture contamination
- Suitable for all types of electrodes







ANTI-SPATTER ANTI-SPATTER AEROSOL NOZZLE DIP GEL • Effective spray to prevent weld spatter · Advanced non-toxic gel formula adhering to metal surfaces and mig • 400g Metal Tin torch parts · Helps maintain optimum gas • Non-Toxic, Non-Flammable coverage Paintable - No Silicone Advanced gel designed to stop spatter adhering to mig torch parts Super-Safe, No-Hassle Formula! Description Unit Part No. Description Unit Part No. 9-AAS 454g Each 9-NDG 400g Metal Tin Each

ANTI-SPATTER FLUID

 Designed to stasurfaces Water based & Paintable With anti - rust properties Can be diluted required (1:1) Quality Austramade 	t d if		literet and the second se
Part No.	Description	Unit	
9-AS2	750ml Spray Bottle 5L Container	Each	
9-AS3 9-AS4	20L Container	Each Each	
		5	



Introducing... Jackson[®] Contour[®] Pipe Tools


WELDCLASS IS YOUR OFFICIAL CONTOUR SUPPLIER FOR AUSTRALIA





check out the contour Video



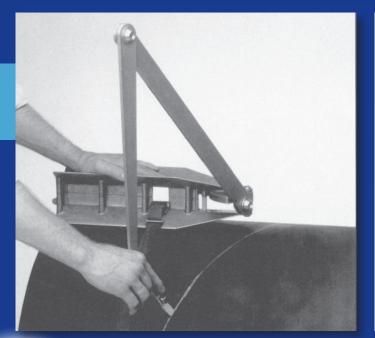





CENTERING HEADS CONTOUR

- Aids in the settings of centerlines, establishing angles and marks for butt-ins, locating points inside pipes and tanks, laying out keyways and measuring declivity
- Used most often for finding top dead center or bottom dead center on pipe
- You can use it to find the location of other ordinate lines on the sides or at different angles.

Description	Unit
Standard No.6 100mm	Each
Jumbo No.7 200mm	Each
Replacement Centering Pin Std	Each
	Standard No.6 100mm Jumbo No.7 200mm

RADIUS MARKERS CONTOUR

- Easy circle & radius marking
- Sturdy friction joints to maintain rigidity and accuracy
- Made from lightweight, rustproof aluminum for long wear



Part No.	Description	Unit
KC-J1884	Mini, 200mm Radius	Each
KC-J1885	Small, 500mm Radius	Each
KC-J1886	Standard, 600mm Radius	Each
KC-J1887	Jumbo, 1000mm Radius	Each





WRAP-A-ROUNDS CONTOUR

- · Inexpensive tool for marking straight lines around pipe, or for use as a straight edge
- Printed with scale, pitch chart, tangent chart and other useful markings
- Withstands service temperature of up to 180?c (350?F)

WRAP SIZE:

- 164B Medium: 100 x 1220mm (3.88in x 4ft)
- 176B Large: 100 x 1830mm (3.88in x 6ft)
- 177B XL: 125 x 2130mm (5in x 7ft)
- 179B XXL: 125 x 2740mm (5in x 9ft)

SUITS PIPE SIZE:

- 164B Medium: 75-150mm (3-6 in) double-wrap, or up to 320mm (13 in) single wrap
- 176B Large: 75-250mm (3-10 in) double-wrap, or up to 480mm (19 in) single wrap
- 177B XL: 100-300mm (4-12 in) double-wrap, or up to 560mm (22 in) single wrap
- 179B XXL: 150-405mm (6-16 in) double-wrap, or up to 720mm (28 in) single wrap

Part No.	Description	Unit
KC-J1858	164b Medium 100x1220mm	Each
KC-J1859	176b Large 100x1830mm 177b XL 125x2130mm	Each
KC-J1860	177b XL 125x2130mm	Each
KC-J1861	179b XXL 125x2740mm	Each

DIAL ANGLE FLANGE LEVEL CONTOUR

- Versatile tool that can be used as a dial degree utility level or, with attachments, for two-holing flange alignment.
- · Saves time, Easy to use
- Fitted with a threaded, self aligning conical spacer and conical nut and bolt units for fastening the Level to a pipe flange
- One of the nut and bolt units is stationary, while the other slides up to 140mm (5-1/2 in) along a slot in the level to accommodate various flange bolt hole spacings from 50mm (2 in) to 140mm (5-1/2 in)



Part No.	Description	Unit
KC-J1891	Dial Angle Flange Level No.20	Each







UNIVERSAL LEVEL (MAGNETIC) CONTOUR

- · Valuable Multi-purpose tool for assisting in a range of pipefitting tasks
- Adju pos
- Mag

Adjustable 360 position Magnetic	DDG protractor-dial level allows u	e in any	
Part No.	Description	Unit	
KC-J1904	Universal Level No.33	Each	

CONTOUR PRO-MAG LEVEL CONTOUR

- Lightweight, easy to use tool for determining and setting up angles
- Ideal for pipefitters and welders
- Magnetic
- 360-degree adjustable dial leve (DSL) with two 90-degree quadrants graduated in 2-1/2-degree increments
- Cast in are tables used to convert degree-of-angle to risein-inches-per-foot or millimeters-per meter

Part No. Description Unit KC-J1881 Each Pro-mag Level No.8

DIAL AND LEVEL CONTOUR

- · Adjustable bubble dial protractor level used with a number of Contour Curv-O-Mark Tools
- The protractor covers 180 degrees through two 90 degree quadrants, reading in 2.5 degree increments
- Bubble is cast in the aluminum dial



Part No.	Description	Unit
KC-J1905	Dial & Level No.dsl	Each





CONTOUR MARKERS CONTOUR

- Compact, time-saving tool used for lay out marking of pipe and structural steel joints.
- Laterals at any angle, tees, wyes, crosses, elbows-any type or size of joint can be quickly and precisely laid out
- No more complicated formulas, trial and error, or wasted materials



Part No.	Description	Unit
KC-J1874	Standard No.1	Each
KC-J1877	Jumbo No.4	Each

CIRCLE ECLIPSE PROJECTOR CONTOUR

- Features a protractor with sliding rods & adjustable lever to lock in the specified layout
- A strong, 20-pound pull magnetic base holds the Projector in position during layout
- A durable web strap (included) holds the unit secure on non magnetic surfaces and can be used on either side of the vertical column



Part No.	Description	Unit
KC-J1888	Circle Eclipse Projector No.14	Each

COMBINATION ADAPTORS CONTOUR

- Optional accessory for Contour Markers to simplify handling and increase layout capacity
- Allows layouts with compound angles using a just one setting or any degree of take-off on elbows and turns up to 90 degrees




Part No.	Description	Unit
KC-J1875	Standard No.2	Each
KC-J1878	Jumbo No.5	Each





PROTRACTOR (MAGNETIC) CONTOUR

- Handy tool for use in making and checking angles, particularly in pipe layout
- · Saves time, easy to use
- Magnetic base



MULTI TRAMMEL HEADS CONTOUR

- Radius Marking points designed to fit to standard 1/2 in (12.7mm) pipe
- The most accurate means of drawing arcs and circles because you can lock the radius tight.
- Save room in your tool box use any standard 1/2-in pipe or conduit on the job site to create the radius you need



Part No.	Description	Unit
KC-J1890	Multi Trammel Heads No.19	Each


PIPE FLANGE ALIGNER CONTOUR

- Self-determining flange aligning tool for fast & accurate pipe construction
- Inserts easily into pipe, centers snugly against the inside pipe diameter and automatically aligns with the pipe axis
- Save time, easy to use



FLANGE ALIGNER BASE CONTOUR

- Easier flange aligning and squaring
- Holds a square in the needed position without tying up one's hands
- Magnetic





Part No.

KC-J1883



A quick look at...

PROMAX 500... WHAT OTHER WELDERS SAY

Great comfy helmet big screen is awesome and the price is right

Great Helmet so far.... lightweight, sensitive, and love the oversize viewing area.

Great helmet, love the field of view and fitting style

Comfortable fit. Love the big viewing area.

The screen size is unreal for the price I paid ... Excellent quality too!

Beautiful helmet to use

At last somebody has supplied a helmet with a large screen at an affordable price... Well done!

Fantastic helmet, can't wait to get welding again.

The Promax 500 is fantastic, large screen, so much better than my old helmet...thank-you

See Page 104

Safety; Eye, Ear & Respiratory Weldclass



A HELMET FOR EVERY FABRICATOR



	WELDCLASS Promax 200	WELDCLASS Promax 350	WELDCLASS Promax 500	WELDCLASS Promax 400R	JACKSON WH70	JACKSON WH70 AIRMAX
MIG & Stick	Yes	Yes	Yes	Yes	Yes	Yes
TIG	-	Yes >30Amps	Yes >5Amps	Yes >5Amps	Yes >1Amp	Yes >1Amp
Grind Mode	Yes	Yes	Yes	Yes	Yes External Switch	Yes External Switch
Shade Range	9-13	9-13	5-8/9-13	9-13	6-8/9-13	6-8/9-13
View Area	96 x 39mm	100 x 53mm	98 x 87mm	96 x 48mm	96 x 69mm	96 x 69mm
Sensors	2	4	4	2	2 + Intelligent Sensing	2 + Intelligent Sensing
Optical Rating	1/1/1/2	1/1/1/2	1/1/1/2	1/1/1/2	1/1/1/1 World First	1/1/1/1 World First
Powered Respirator	-	-	-	Yes	-	Yes
Warranty *on auto Lens	1yr	2yr	2yr	3yr	5yr	5yr
Indicative \$ excl. GST	\$89.00	\$139.00	\$180.00	\$999.00	\$599.00	\$1,699.00

Phone 1300 784 200 for your nearest Distributor



Available from a Distributor near You!





Safety; Eye, Ear & Respiratory Weldclass





•	"Full Laminate" ler	ns constructi	on: Each laye	er in lens assembly
	is laminated for su	perior optic	al quality an	d reliability

Bonus helmet bag



Each

Each

WC-05313 WC-05314

Blue

Fire Metal



WELDING HELMET **PROMAX 500**

85cm2 of uttra-clear vision!

2 year Warranty

Grind-Mode

INDICATIVE PRICE

00

Locks the lens in light shade at the flick of a switch.

4 Arc Sensors for reliable arc detection & switching

Super-size Viewing Area 98 x 87mm

Reliable Power Source Replaceable battery, solar assist, efficient electronics for low power consumption

Manification Lens Holder

Light Weight & Comfortable

AS1337.1 High-Impact Rated A must for many work sites

Shade, Sensitivity & Delay Adjustments Precise & easy-to-use controls



Unit Part No. Description WC-05317 Black Stealth Each

For your nearest Distributor Phone 1300 784 200 *Prices are indicative only and may va depending on volumes, freight cost, models/options & other factors

• For MIG, Stick Welding & TIG welding down to 5 amps

Ø.

- Fast & easy cover lens replacement
- "Full Laminate" lens construction: Each layer in lens assembly is laminated for superior optical quality and reliability
- Bonus helmet bag



Safety; Eye, Ear & Respiratory Weldclass



WELDING HELMET WITH POWERED AIR RESPIRATOR **PROMAX 400R**

Digital Lens

Shade, sensitivity, delay and grind-mode controls 3 Year lens Warrantv



Affordable à professional clean air

8 Fan Speed Settings For optimum comfort and battery life

W

Weldclas

Promax R20 Powered **Respirator System** Battery powered, lightweight.

P3 Class Respirator to protect from harmfull welding fumes

Affordable & Reliable Industrial quality tried, tested & proven world-wide

100% Solar Powered

No batteries to replace, no on/ off buttons, ready to weld at any time

Exceptionally Lightweight Reduced operator Fatigue

- For MIG, Stick & TIG down to 5 amps
- Magnification Len Holder

PACKAGE INCLUDES:

- Promax 400R Helmet with air duct & hood
- Promax R20 Powered Repirator blower & hose
- Battery Charger
- Comfort Belt
- Quality Kit Bag

Part No.	Description	Unit
WC-05158	Promax 400 Helmet with R20 Respirator Package	Each

Weldclass

Available from a Distributor near You!

INDICATIVE PRICE

റ00

For your nearest Distributor

Phone 1300 784 200

Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors

Excl GST



Jackson[®] WH70 Welding Helmets

World's Best Vision*...



Balder® Technology World-leading auto-darkening technology. Developed & Manufactured in Europe since 1979

1/1/1/1 World's best optical rating*
* Best possible rating under EN379 standard. Balder technology is first ever to achieve this

5 Year Warranty World-leading reliability

What Welder's Say

"I found the helmet lens so clear I can even see the weld pool and watch if porosity forms... I was used to just seeing blurs of light with my old helmet. Best helmet I've worn" - Genuine WH70 Owner's comment.

Technology Comparison





www.weldclass.com.au



worlds best vision ...

WELDING HELMET **JACKSON WH70 GDS**

Superior European Quality & Reliability For operators who demand the absolute best!

5 Year Warranty On Auto-darkening lens

100% Solar Powered No batteries to replace, no on/off buttons, ready to weld at any time

> World's first 1/1/1/1 **Optical Rating** Clarity of Vision second to none

Wide-View Lens

Tested & Conforms to: AS1337.1 High-Impact (helmet) and AS1338.1(lens)



· For the serious professional & Industrial Applications

• For MIG, TIG & Stick, including low-amp TIG down to 1 amp

Part No.	Description	Unit
KC-J9916	Helmet - WH70 GDS	Each

Hard-Hat System See page 111

1/1/1/1 rating! Low-Profile **External Controls** No need to remove helmet to adjust settings



A. DELAY adjusts time from dark to light state

- **B. SHADE ADJUSTMENT** 6-8/9-13
- C. GRIND MODE FUNCTION
- D. SENSITIVITY adjusts to suit all welding environments

Jackson '375' Headgear

Comfortable, robust, easy to adjust







WELDING HELMET WITH POWERED AIR RESPIRATOR **JACKSON WH70 GDS + AIRMAX ELITE**

Superior European Quality & Reliability For operators who demand the absolute best! WH70 GDS Helmet See previous page for helmet details

Jackson '375' Headgear Comfortable, robust, easy to adjust

> **Integrated Duct System** Tidy, Compact, No loose parts

> > 'TH3' Rated Filter Highest possible rating for filter efficiency and air purity

Unique Face Seal System Push face into seal, pull face

Ultra-comfortable, no hoods

'Airmax Elite' Respirator System Advanced, Low-Profile & Light Weight. Up to 10 hours battery life. Dual filters for long life. Tested & Conforms to AS1716

The ulimate Air-Fed

Helmet package!

External Controls including Grind Mode No need to remove helmet.

Exceptional clarity of vision

eliminates need to flip up

helmet when grinding



Air Outlet Located directly in breathing zone. Adjustable vent



out to remove.

or strings

INDICATIVE PRICE 00your nearest Distribu Phone 1300 784 200 est Distributo *Prices are indicative only and may vary depending on volumes, freight cost, models/ options & other factors

• For the serious professional & Industrial Applications

For MIG, TIG & Stick, including low-amp TIG down to 1 amp

Part No.	Description	Unit
KC-J5225/K	Helmet WH70 GDS Alr + Airmax Elite Sytem	Each




www.weldclass.com.au



HARD-HAT KIT FOR JACKSON WH70 WELDING HELMETS

• Hard-Hat and Adaptor Kit

• Specifically engineered to suit Jackson WH70 Helmets, for perfect balance and fit



Functional & Robust Firm attachment to Hard-Hat. Easily attaches or detaches.

Light, Comfortable & Well Balanced

Easy to wear, even for long periods



199⁰⁰ Excl GST For your nearest Distributor Phone 1300 784 200 *Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors

Easy to Fit

Remove existing Headgear, replace with adaptor kit

High Quality Hard-Hat Ratched style Headgear for firm fit. Made in Europe

Part No.	Description	Unit
KC-J5234/K	Hard-Hat with Adaptor Kit	Each




MAGNIFICATION LENS HOLDER FOR JACKSON WH70 HELMETS

- · Adaptor frame to enable fitting of Magnification lens to Jackson WH70 welding helmets
- Fits to inside of Helmet





SPARE PARTS FOR WELDCLASS WELDING HELMETS

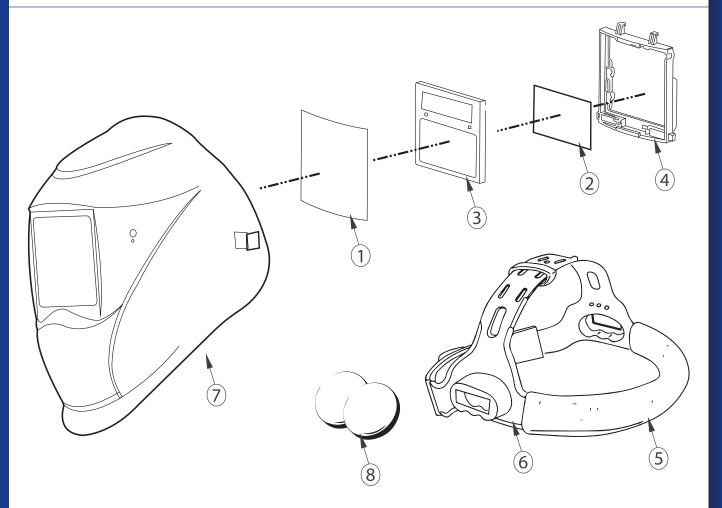

Part No.	Description	Helmet Model	Ref	Unit
See page 115	Cover Lens – Outer	See page 115	1	
See page 115	Cover Lens – Inner	See page 115	2	
WĊ-05327	Auto-Darkening Lens Cassette	Promax 200	3	Each
WC-05328	Auto-Darkening Lens Cassette	Promax 350	3	Each
WC-05175	Auto-Darkening Lens Cassette	Promax 400	3	Each
WC-05329	Auto-Darkening Lens Cassette	Promax 500	3	Each
WC-05330	Lens Retainer Frame	Promax 200, 350	4	Each
WC-05331	Lens Retainer Frame	Promax 500	4	Each
WC-01630	Sweatband	Promax 200, 350, 500	5	Pkt 5
P7-M3SB	Sweatband	Promax 300, Platinum 600	5	Each
WC-05172	Sweatband	Promax 400R (respiratory)	5	Each
WC-01629	Sweatband	Flip-Front	5	Each
WC-05325	Headgear	Promax 200, 350, 500	6	Each
7-M3HG	Headgear	Promax 300, Platinum 600	6	Each
WC-05165	Headgear	Promax 400 (includes air duct)	6	Each
7-M2HG	Headgear	Mach 2, 4	6	Each
7-FFHG	Headgear	Flip-Front	6	Each
WC-05174	Shell + Headgear + Face Seal	Promax 400R (respiratory)	7	Each
WC-03987	Battery – CR2032	Promax 300, 350, 500	8	Each
WC-02640	Battery – CR2450	Promax 500, Platinum 600, Mach2, Mach6	8	Each



www.weldclass.com.au (1300 784 200



SPARE PARTS

FOR JACKSON WH70 WELDING HELMETS



SPARE PARTS FOR JACKSON AIRMAX ELITE RESPIRATOR





Available from a Distributor near You!



SPARE PARTS FOR PROMAX R20 POWERED AIR RESPIRATOR



SWEATBANDS UNIVERSAL

- Universal Velcro style Fit Suit Almost Any Helmet
- Heavy-Duty Multi-Layered Towelling for Long-Lasting Comfort



Part No.	Description	Unit
WC-01630	PROMAX SB2 Sweatbands - Towel/ Velcro Style	Pkt 5

AUTO DARKENING LENS PROMAX 100

- Fits standard flip-front helmets
- Solar powered
- Shade 11
- Suitable for MIG and Stick/MMA
- 12 month Warranty








CLEAR LENSES

FOR STANDARD FLIP-FRONT **HELMETS**

- Suits most common Flip-front Helmets
- Size 108 x 51mm suits most standard flip-front helmets
- 7-CL39 'CR39 Style' Spatter Resistant
- 7-CLPC Polycarbonate Impact-Resistant



Part No.	Description	Unit
7-CL39	CR39 Style 108 x 51mm	Each
7-CLPC	CR39 Style 108 x 51mm Polycarbonate 108 x 51 x 2mm	Each
7-CLPC	Polycarbonate 108 x 51 x 2mm	Each

MAGNIFICATION LENSES

108 X 51MM

- Size 108 x 51mm suits most standard flip-front helmets
- Available in 1.5,2.0 & 2.5 times magnification
- Improves clarity of vision



Part No.	Description	Unit
P7-ML15	1.5x Diopter	Pkt
P7-ML20	2.0x Diopter	Pkt
P7-ML25	2.5x Diopter	Pkt

SHADE LENSES 108 X 51MM

- Quality replacement glass shade lenses
- Size 108 x 51mm suits most standard flip-front helmets



Part No.	Description	Unit
7-SL9	Shade 9	Each
7-SL10	Shade 10	Each
7-SL11	Shade 11	Each
7-SL12	Shade 12	Each





CLEAR COVER LENSES FOR WELDING HELMETS

Find the right Clear Cover Lens for you welding Helmet Fast!

See Reference Chart on Following pages...



weldclass.com.au/lens-search



OR





LENS REFERENCE CHART

HELMET BRAND*	HELMET MODEL*	LENS TYPE	CROSS REF*.	LENS DIMENSIONS	P/NO.	SHAPE
	Dec. 100 200	Outer		115 x 104mm	WC-05323	
Prom 3	Promax 200	Inner		102 x 42mm	WC-05320	
	Promax 300 / Mach	Outer		133 x 114mm	P7-CL133114/10	
	3	Inner		107 x 54mm	P7-CL10754/5	
	Due 250	Outer		115 x 104mm	WC-05323	
	Promax 350	Inner		106 x 59mm	WC-05321	
	D 400	Outer		110 x 90mm	P7-CL11090/10	
	Promax 400	Inner		107 x 51mm	P7-CL10751/5	
LDCLASS	Dromov 500	Outer		137 x 117mm	WC-05324	
	Promax 500	Inner		105 x 92mm	WC-05322	
	Platinum 600 /	Outer		133 x 114mm	P7-CL133114/10	
	Mach 6	Inner		106 x 63mm	P7-CL10663/5	
		Outer		122 x 115mm	P7-CL122115/10	
	Mach 4 (old model)	Inner		107 x 51mm	P7-CL10751/5	
	Mach 2 (old model)	Outer	P7-M2OL10	122 x 102mm	P7-CLM2/10	
		Inner	P7-C2IL5	107 x 51mm	P7-CL10751/5	
O	Cobra	Outer/Inner	EPEAOPCP1	110 x 90mm	P7-CL11090/10	
One®	Viper	Outer/Inner	EPEAOPCP2	114 x 133mm	P7-CL133114/10	
Auto-Tracker /		Outer	5000-211	180 x 115mm	P7-CLOPS/5**	
9	Switch / Multi- Process See Also "WeldGuarc	Inner I″ Brand	5000-328	107 x 51mm	P7-CL10751/5	
		Outer	700228	120 x 98mm	P7-CLTD/10	
	Top Dog	Inner	700229	95 x 51mm	P7-CL9551/5	
	Blaze / Graphite /	Outer	700228	120 x 98mm	P7-CLTD/10	
/ Boss-	Urban / Street	Inner	700235	103 x 69mm	P7-CL10369/5	
®	Moga View Carias	Outer	700320	133 x 114mm	P7-CL113114/10	
	Mega-View Series	Inner	700321	104 x 96mm	ТВА	
	Speedy	Outer	700340	115 x 87mm	TBA	
	Speedy	Inner	700342	103 x 53mm	P7-CL10353/10	
	Woldskill	Outer	454308	114 x 89mm	P7-CLCWS/10	
vold®	Weldskill	Inner	454309	105 x 46mm	P7-CL10546/5	
weld®	ProPlus+	Outer	454356	133 x 114mm	P7-CL133114/10	
	FIOFIUST	Inner	454357	97 x 65mm	P7-CL9765/10	



LENS REFERENCE CHART - CONT'D

HELMET BRAND*	HELMET MODEL*	LENS TYPE	CROSS REF*.	LENS DIMENSIONS	P/NO.	SHAPE
	Dualita	Outer	454329	123 x 98mm	WC-05157	
Cigweld® Arcmaster Pro	ProLite	Inner	454328	97 x 65mm	WC-05156	
	Outer	454298	110 x 180mm	P7-CLCAP/10		
	Arcmaster Pro	Inner	454299	107.8 x 51mm	P7-CL10751/5	
N	New Tech 6-13 XL	Outer	0700 000 139	110 x 90mm	P7-CL11090/10	
	ADC Plus	Inner	0700 000 268	107 x 71mm	KC-J9932	
F 1.0	New Tech 9-13 ADC	Outer	0700 000 139	110 x 90mm	P7-CL11090/10	
Esab®	Plus	Inner	0700 000 228	107 x 51mm	P7-CL10751/5	
	Aviete Te ele	Outer	0700 000 010	115 x 95mm	P7-CL11595/10	
	Aristo Tech	Inner	0700 000 371	107 x 51mm	P7-CL10751/5	
	Vizor Series	Outer	42.0510.0024	180 x 115mm	P7-CLOPS/5	
	Vizor 1000	Inner	42.0510.0019	107 x 51mm	P7-CL10751/5	
Fronius®	Vizor 3000	Inner	42.0510.0092	107 x 54mm	P7-CL10754/5	
	F 1000	Outer	42.0510.0112	137 x 126mm	WC-05056	
	Fazor 1000	Inner	42.0510.0092	107 x 54mm	P7-CL10754/5	
Jackson		Outer	P7-CLBD3/10	141 x 126mm	KC-J9931	
(Balder)	WH70 (BH3) GDS	Inner	P7-CL10771/10	107 x 71 mm	KC-J9932	
	Data CO	Outer	9873252	110 x 60mm	P7-CL11060/10	
	Beta 60	Grinding Visor	9873254	110 x 90 x 1.5mm	P7-CL1109015/10	
		Outer	9873253	110 x 90 x1.0mm	P7-CL11090/10	
V : @		Grinding Visor	9873254	110 x 90 x1.5mm	P7-CL1109015/10	
Kemppi®	Beta 90	Inner - Beta 90A	9873253	110 x 90 x1.0mm	P7-CL11090/10	
		Inner - Beta 90X	9873251	107 x 51mm	P7-CL10751/5	
	Viking 700G &	Outer	KP2913-1 / 94006943-1	112 x 91mm	P7-CL11291/10	
I. I. A	Power Craft Series	Inner	KP2897-1 / 94006943-3	95 x 51mm	P7-CL9551/5	
Lincoln®	Viking 3350 Series	Outer	KP2898-1	133 x 114mm	P7-CL133114/10	
	(Large Lens)	Inner	KP3044-1	94 x 89mm	P7-CL9489/5	
	Dominator (old	Outer	LA-EH913-3P	102 x 122mm	P7-CLM2/10	
Liquidarc [®] model)		Inner		107 x 51mm	P7-CL10751/5	

The replacement lenses advertised are original Weldclass products only, unless specifically indicated by this symbol **. Any brand names or trade names or part numbers shown other than Weldclass are the property of their respective owners and are shown for identification purposes only and are not in any way affiliated with Weldclass. E.&O.E.



www.weldclass.com.au (1300 784 200



LENS REFERENCE CHART - CONT'D

HELMET BRAND*	HELMET MODEL*	LENS TYPE	CROSS REF*.	LENS DIMENSIONS	P/NO.	SHAPE
	Elite, Titanium 9400	Outer	216326P	145 x 120 mm	P7-CLME/10	
	/ 9400i	Inner	216327P	106 x 63 mm	P7-CL10663/5	
	Titanium 9400i	Grinding Visor	245818		ТВА	
	Performance	Outer	231921P	112 x 126mm	P7-CLMPF/10	
		Inner	770237P	107 x 51mm	P7-CL10751/5	
Miller® (See also	Pro-hobby &	Outer	231411P	115 x 95mm	P7-CL11595/10	
(WIA' brand)	Pro-hobby FS10	Inner	770237P	107 x 51mm	P7-CL10751/5	
	(old models)	Inner –early model	231410P	107 x 44mm	P7-CL10744/5	
	Flame & Xii	Outer	770240P	114 x 86mm	P7-CL11486/10	
	(old models)	Inner	770237P	107 x 51mm	P7-CL10751/5	
	Xlix	Outer	770241P	116 x 96mm	P7-CLMXL/10	
	(old models)	Inner	770237P	107 x 51mm	P7-CL10751/5	
	NW4/12005	Outer	NWHOL	117 x 87mm	P7-CL11787/10	
NuWeld®	NWH3005	Inner	NWHIL2	94 x 45mm	P7-CL9445/5	
	Satellite, Orion, Mira Plus, OS100	Outer	5000.210 / 5000.212	180 x 115mm	P7-CLOPS/5**	
	p500 Series	Outer	5000.250 / 5001.250	137 x 126mm	WC-05056	
	e640, OSC, Satellite, Orion, Miraplus	Inner	5000.300	107 x 51mm	P7-CL10751/5	
Optrel® (Sperian®)	e650, e670, e680, p550, p530	Inner	5000.001	107 x 54mm	P7-CL10754/5	
	Galaxy	Inner / Outer	5000.227	107 x 51mm	P7-CL10751/5	
	Guidky	Grinding Visor	5000.226	108 x 68mm	P7-CL10868/5	
	OSC, Twisty, Mira (old models)	Outer	5000.105	110 x 86mm	P7-CL11086/10	
		Outer	NWHOL	117 x 87mm	P7-CL11787/10	
Decc®	RXH100F	Inner	NWHIL1	90 x 42mm	P7-CL9042/5	
Ross®	DVUDDOC	Outer	NWHOL	117 x 87mm	P7-CL11787/10	
	RXH300S	Inner	NWHIL2	94 x 45mm	P7-CL9445/5	

The replacement lenses advertised are original Weldclass products only, unless specifically indicated by this symbol **. Any brand names or trade names or part numbers shown other than Weldclass are the property of their respective owners and are shown for identification purposes only and are not in any way affiliated with Weldclass. E.&O.E.





LENS REFERENCE CHART - CONT'D

HELMET BRAND*HELMET MODEL*LENS TYPECROSS REF*.LENS DIMENSIONSP/NO.SHAPEServore / ServoGlas*OuterAD/APFCL120 x 85mmP7-CL12085/10Image: Cross Ref*.Image: Cross Re	
Servore / ServoGlas* Defender / Arc Protector Inner AD/APICL 109 x 47mm P7-CL10947/5 ServoGlas* Outer ALFCL 117 x 95mm P7-CL10947/5 Imer SV5000 Auto-Lift Outer ALICL 107 x 51mm P7-CL10751/5 Imer 9000/9002 Series & Utility Outer ALIPL 268 x 89mm P7-CLSV5GV/10 Imer 9000/9002 Series & Utility, 9000U/F/V, 9002V Outer 426000 / 420150 (also 427000 / 420100) 162 x 97mm P7-CLS09/10 Imer Utility, 9000U/F/V, 9000X / 9002X Inner 428000 (42020) 90 x 42mm P7-CL9042/5 Imer	
Servore / ServoGlas*ProtectorInnerAD/APICL109 x 47mmP7-CL10947/5ServoGlas*OuterALFCL117 x 95mmP7-CL11795/10 $SV5000$ Auto-LiftInnerALICL107 x 51mmP7-CL10751/5Grinding VisorALIPL268 x 89mmP7-CLSV5GV/10 $9000/9002$ Series & UtilityOuter $426000/420150$ (also $427000/$ 162 x 97mmP7-CLSV5GV/10Utility, 9000U/F/V, 9000X / 9002XInner428000 (420200)90 x 42mmP7-CL9042/59000X / 9002XInner428010 (420210)103 x 53mmP7-CL10353/5	
ServoGlas* Inner ALICL 107 x 51mm P7-CL10751/5 Sv5000 Auto-Lift Inner ALICL 107 x 51mm P7-CL10751/5 Grinding Visor ALIPL 268 x 89mm P7-CLSV5GV/10 9000/9002 Series & Utility Outer 426000 / 420150 (also 427000 / 420100) 162 x 97mm P7-CLSG9/10 Utility, 9000U/F/V, 9002V Inner 428000 (420200) 90 x 42mm P7-CL9042/5 9000X / 9002X Inner 428010 (420210) 103 x 53mm P7-CL10353/5	
SV5000 Auto-Lift Inner ALICL 107 x 3 min P7-CL10731/3 SV5000 Auto-Lift Grinding Visor ALIPL 268 x 89mm P7-CLSV5GV/10 9000/9002 Series & Utility Outer 426000 / 420150 (also 427000 / 420100) 162 x 97mm P7-CLSV5GV/10 Utility, 9000U/F/V, 9002V Inner 428000 (420200) 90 x 42mm P7-CL9042/5 9000X / 9002X Inner 428010 (420210) 103 x 53mm P7-CL10353/5	
Grinding Visor ALIPL 268 x 89mm P7-CLSV5GV/10 9000/9002 Series & Utility Outer 426000 / 420150 (also 427000 / 420100) 162 x 97mm P7-CLSG9/10 Utility, 9000U/F/V, 9002V Inner 428000 (420200) 90 x 42mm P7-CL9042/5 9000X / 9002X Inner 428010 (420210) 103 x 53mm P7-CL10353/5	
0000/9002 Series & Outer (also 427000 / 420100) 162 x 97mm P7-CLSG9/10 Utility 0000/F/V, 9002V Inner 428000 (420200) 90 x 42mm P7-CL9042/5 9000X / 9002X Inner 428010 (420210) 103 x 53mm P7-CL10353/5	
9002V Inner 428000 (420200) 90 x 42mm P7-CL9042/5 9000X / 9002X Inner 428010 (420210) 103 x 53mm P7-CL10353/5	
Inner 428010 (420210) 103 x 53mm P7-C110353/5	
series	
Outer 776000 (also 777000) 148 x 86mm P7-CLSG1/10	
Speedglas® Inner 428000 (420210) 90 x 42mm P7-CL9042/5	
(3M®) Outer 526000 (also 527000) 155 x 96mm P7-CLSG91/10**	
Inner -9100V 528005 117 x 50mm P7-CL11750/5	
9100 series Inner -9100X 528015 117 x 61mm P7-CL11761/5	
Inner -9100XX 528025 117 x 77mm P7-CL11777/5	
9100-FX Grinding Visor 523000 225 x 110mm P7-CLSG91FXV/5	
NTADF100F Outer NTADF100F/SG 110 x 90mm P7-CL11090/10	
Tecmen® Outer NTADF700S/SG 110 x 90mm P7-CL11090/10	
NTADF7003 Inner NTADF700S/IG 95 x 51mm P7-CL9551/5	
Top Dog See Boss / BossSafe	
Razorback XA-5001 Outer UMRBOP 133 x 114mm P7-CL133114/10 RazorWeld XA-5022 Innor UMRBIP 106 x 65mm P7-CL10665/5	
Black, Aus-Ace,	
Graphic, Etc Inner UMIP 103 x 47mm P7-CL10347/5	
Outer UMLOP 117 x 95mm P7-CL11795/10	
Flame 5000X Auto- Inner UMLIP 107 x 51mm P7-CL10751/5 Lift Image: Comparison of the second seco	
Grinding Visor UMLPL 268 x 89mm P7-CLSV5GV/10	
Wide-View Aust Outer UMAOP 133 x 114mm P7-CL133114/10	
Flag (Old model) Inner UMAIP 106 x 63mm P7-CL10663/5	



www.weldclass.com.au (1300 784 200



LENS REFERENCE CHART - CONT'D

HELMET BRAND*	HELMET MODEL*	LENS TYPE	CROSS REF*.	LENS DIMENSIONS	P/NO.	SHAPE
		Outer	WG4700	110 x 98mm	P7-CL11098/10	
	AUTOchange	Inner	WG4701H	103 x 47mm	P7-CL10347/5	
	Auto-Tracker /	Outer	5000-211	180 x 115mm	P7-CLOPS/5	
WeldGuard®	Multi-Process	Inner		107 x 54mm	P7-CL10754/5	
(BOC®)	Colory	Inner / Outer		107 x 51mm	P7-CL10751/5	
	Galaxy	Grinding Visor		108 x 68mm	P7-CL10868/5	
	Weldview WH1000	Outer	WH1000-ECL	110 x 90mm	P7-CL11090/10	
		Inner	WH1000-ICL	96 x 47mm	P7-CL9647/5	
	Weldview "Aussie Blue"	Outer	WH1000AB-ECL	112 x 91mm	P7-CL11291/10	
		Inner	WH1000AB-IL	95 x 51mm	P7-CL9551/5	
Weldmaster®	Weldview WH720S	Outer	WH720S-3	118 x 108mm	P7-CL118108/10	
weidmaster*		Inner	WH720S-5	98 x 45mm	P7-CL9845/5	
	Weldview WH820S	Outer		133 x 114mm	P7-CL133114/10	
	Weldview WH8205	Inner		94 x 89mm	P7-CL9489/5	
	Solar-Storm	Outer		110 x 90mm	P7-CL11090/10	
	(WH2000)	Inner		107 x 51mm	P7-CL10751/5	
\A/I A ®		Outer	235621P	102 x 122mm	P7-CLM2/10	
WIA®	WIA® Blue	Inner	770237P	107 x 51mm	P7-CL10751/5	

The replacement lenses advertised are original Weldclass products only, unless specifically indicated by this symbol **. Any brand names or trade names or part numbers shown other than Weldclass are the property of their respective owners and are shown for identification purposes only and are not in any way affiliated with Weldclass. E&O.E.

check out ...

weldclass.com.au/lens-search





Available from a Distributor near You!



Weldclass Customer driven innovation. Safety; Eye, Ear & Respiratory

GOGGLES OXY



SAFETY SPECS SHADE 5

- Snug wrap around fit for comfort and protection
- Shade 5 Oxy specs
- Suitable for most plasma and Oxy cutting operations



Part No.	Description	Unit
7-MS5	Shade 5 (For Oxy / Plasma)	Pair

FACE SHIELDS CLEAR

- Protection for Grinding, Chipping, etc
- AS1337.1 High-Impact Rated
- Suitable for workplaces that require High-Impact visors



Part No.	Description	Unit	Part No.
7-FSC	Complete Faceshield - Clear	Each	7-FS5
7-FCV	Replacement Visor Only - Clear	Each	7-F5V
	,		

FACE SHIELDS SHADE 5

- Shade 5 for Oxy & Plasma Work
- Superior to Goggles or Specs: Protects the Whole Face from Arc Rays/Flash, Heat and Particles



Part No.	Description	Unit
7-FS5	Complete Faceshield - Shade 5	Each
7-F5V	Replacement Visor Only - Shade 5	Each





SAFETY SPECS ACE

- · Low cost and stylish eye protection
- Close fitting wrap around design
- Full UV protection against sun glare
- Certified to AS/NZS 1337.1 Medium impact



Part No.	Description	Unit
7-ACC	Clear	Pair
7-ACS	Smoke	Pair
7-ACA	Amber (Indoor / Light Enhancing)	Pair
	(indoor / Eight Einhaneing)	



SAFETY SPECS PROMAX'BLZ'

• Protects like a goggle • Light Weight • Extremely Comfortable Face Seal Gasket Protects like a Goggle, Ultimate eye protection Clear **Bonus Strap** Improves effectiveness of the face seal & enables wearing of ear muffs Easy change from side arms to strap Smoke Part No. Description Unit 7-BZC Clear - With Bonus Strap & Pouch Pair Smoke - With Bonus Strap & Pouch Amber (Indoor / Light Enhancing) -7-BZS Pair 7-BZA Pair Amber With Bonus Strap & Pouch





WELDING CURTAINS

- · Designed to protect workers from indirect welding flash
- Allows natural light into work areas
- Zip-Ties and Curtain Rings Supplied with Each Curtain -Ready to Install
- · Long-Life Construction: Double Hem, Stitched with Heat-Resistant Kevlar Thread, with Heavy Duty Brass Eyelets
- Available in Red or Green
- Fire retardant •
- Tested & Conforms to DIN EN 1598: 2011-12 (European . standard)
- Comes with Free rings of ties!

Part No.	Description	Unit
7-1813G	1.8 x 1.3m Green	Each
7-1813R	1.8 x 1.3m Red	Each
7-1818G	1.8 x 1.8m Green	Each
7-1818R	1.8 x 1.8m Red	Each
7-1820G	1.8 x 2.0m Green	Each
7-1820R	1.8 x 2.0m Red	Each
7-1827G	1.8 x 2.7m Green	Each
7-1827R	1.8 x 2.7m Red	Each
7-1834G	1.8 x 3.4m Green	Each
7-1834R	1.8 x 3.4m Red	Each
7-1855G	1.8 x 5.5m Green	Each











WELDING CURTAIN FRAME & KITS HEAVY-DUTY 1.8 X 2.0M · Heavy-Duty Coated RHS Frame with Welded Corner Brackets · Includes Lockable Castor Wheels • Two or More Frames Can be Joined Together (bolts and nuts/washers included), to Create Longer Screens. Heavy-Duty! • Frame only - does not include curtain • Suits 1.8 x 2.0m curtains INDICATIVE PRICE 7-WCF1820 Frame Only 000Excl GST For your nearest Distributor Phone 1300 784 200 Phone 1300 784 200 Prices are indicative only and may vai depending on volumes, freight cost, models/options & other factors Part No. Unit Description H/Duty - Suit 1.8 x 2.0m Curtain [Frame Only] WC-04012 Each Frame & Curtain Combo Kit 1.8 x WC-03235K Kit 2.0m Red Frame & Curtain Combo Kit 1.8 x WC-03236K Kit 2.0m Green **WELDING CURTAIN FRAMES & KITS STANDARD 1.8 X 1.8M** Great Value! Coated Steel Frame Spring Pin Joints for Fast Assembly INDICATIVE PRICE WC-04349 Frame Only Includes Castor Wheels • • Supplied in flat pack kit form - Just snap together 00

- · Frame only does not include curtain
- Suits 1.8 x 1.8m curtains



Part No.	Description	Unit
WC-04349	Suit 1.8 x 1.8m Curtain [Frame Only]	Each
WC-03238K	Frame & Curtain Combo Kit 1.8 x 1.8m Red	Kit
WC-03239K	Frame & Curtain Combo Kit 1.8 x 1.8m Green	Kit





Available from a Distributor near You!



EARPLUGS 'PROMAX EP5' DISPOSABLE

- Popular taper fit, soft foam style earplugs for general use
- Tested and conform to AS/NZS1270:2002 for Class 5
 protection
- Each pair is hygienically packed in clear plastic bag





Part No.	Description	Unit
WC-05377	Un-Corded	Box 200pr
WC-05378	Un-Corded	Pkt 500pr

EARMUFF YELLOW 24DB

- Class 4 ear protection 24 dB SLC80 Rating
- Tested and conform to AS/NZS1270:2002
- Durable and light weight



Part No.	Description	Unit
P7-EMC4	Earmuff 24dB	Pair

EARMUFF RED 30DB

- Folding style earmuff with padded comfort headband
- Durable and light weight
- 30dB ear protection





DISPOSABLE RESPIRATORS PROMAX P2 SERIES • Australian standards certified to AS/NZS 1716 • P2 Class Filtering, for dust, mists & fumes • Model P2VC is premium welding respirator with Carbon Filter to remove annoying adours · Electro-statically attracts & traps fine particles into the filter (much more effective than mechanical filtration) P2VF P2V Weldclass Unit Part No. Description With Valve - Cupped PROMAX P2V With Valve - Fold Flat PROMAX P2VF With Valve & Carbon Filter - Cupped PROMAX P2VC Box 10 Box 10 7-RMX06 P2VC 7-RMX08 7-RMX10 Box 10

STUDENT SAFETY KIT

- Ideal for students and apprentices
- Includes: Flip front welding helmet, oxy goggles, clear safety specs, earmuffs & welding gloves
- Supplied with carry/storage bag

Part No.	Descri	ption	Unit
7-TSSK/CBK	Safety Kit		Kit







A quick look at...



- Made with attention to detail & using only the best quality materials
- Designed for comfort and long Service life
- Quality you can feel





RIGGER GLOVES PROMAX KR • Premium A-Grade Cowgrain Leather · Consistent Quality: Each Batch Produced & Checked According to Weldclass Strict Specifications K-evlar sewn for long life! AS/NZS 2161.3 EN 388 3132 Unit Part No. Description 8-WRM Μ Pair 8-WRL Pair Pair XL 8-WRXL 2XL 8-WR2XL Pair

WELDING GLOVES PROMAX BLUE

- Crafted for Excellent Fit: Try a pair to experience the difference!
- Top Quality: Premium cowhide leather, Reinforced, Sewn with Heat-Resistant Kevlar thread
- Available in Left-Hand only, for use where only lefts are used, or where lefts wear at a faster rate than rights
- Fully Lined

Super comfortable a super tough!




Part No.	Description	Unit
WC-01775	400mm - Standard Pairs	Pair
WC-01777	400mm - Left-Hand (1 pr = 2 Left-Hand Gloves)	Pair





WELDING GLOVES PROMAX BLUE XC

- Xtended Cuff: Provides Full Arm Protection total glove length 680mm
- Top Quality: Premium cowhide leather, Reinforced palm, Sewn with Heat-Resistant Kevlar thread
- In hot environments where excess clothing can be a health risk, Platinum XC gloves are sometimes used in place of a full jacket, as they offer full arm protection
- Available in Left-Hand only, for use where only lefts are used, or where lefts wear at a faster rate than rights




usomm for full arm protection!

Part No.	Description	Unit
WC-01774	Xtended-Cuff 680mm - Standard	Pair
WC-01778	Xtended-Cuff 680mm - Left-Hand (1 pr = 2 Left-Hand)	Pair

TIG WELDING GLOVES PLATINUM TG-21

- Top selling TIG Glove: Try a pair to experience the difference!
- Specially Selected Leather and Carefully Crafted for Maximum Comfort and Sensitivity
- The Best of Both: Excellent Dexterity / Feel AND Good Heat-Resistance / Long Life
- Sewn with Heat-Resistant Kevlar Thread = Resistant to Seam Failure



2122	412X4X		
Part No.	Description	Unit	
WC-04676	Platinum TIG Glove 360mm	Pair	







GLOVE SAVERS

- Reduces ""Hot Hand"" Aluminized / Reflective Kevlar back reflects heat away from welding glove
- Increases Glove Life, Provides Extra Protection of Palm, Upper & Thumb
- Slip Over any Welding Glove
- Sewn with Heat-Resistant Kevlar thread
- Available in RH only or LH only



Part No.	Description	Unit
8-LGS	Left Hand - Leather with Aluminised Top	Each
8-RGS	Right Hand - Leather with Aluminised Top	Each

LEATHER SPATTS HOOK & LOOP CLOSURE

- Leather spatts protect your boots and feet from spatter
- Premium cowsplit leather
- Sewn with Kevlar thread
- Long series with Hook & Loop closure
- Height 340mm
- Side stiffeners
- Suitable for general purpose heat,flame and spark protection.



Part No.	Description	Unit
8-LSPV	Height 340mm	Pair
	5	

LEATHER SPATTS BUCKLE STYLE CLOSURE

- Leather spatts protect your boots and feet from spatter
- Premium cowsplit leather
- Sewn with Kevlar thread
- Leather straps with buckle closure
- Side stiffeners
- Height 310mm
- Suitable for general purpose heat,flame and spark protection.

Description	Unit
Height 310mm	Pair
	•





FR HOODS PROMAX (PROBAN STYLE)

- Lightweight and Cool Flame-Resistant Cotton
- Hook & Loop Opening Chin to Chest Allows Wearer to Remove Hood Without Pulling Over The Head - Prevents Dust & Debris Falling Onto the Head, Face & Eyes
- Sewn with Kevlar Heat-Resistant Thread to Prevent Seam Failure, much more durable than standard cotton seams
- Draw-string Face Closure for Close-Fitting Seal against Sparks & Spatter
- 100% Cotton Specially Treated for Flame-Resistance: Durable and More Comfortable than Cotton/Polyester Material INDICATIVE PRICE
- Good Coverage of Head, Neck and Throat



Part No.	Description	Unit
WC-01795	PROMAX Blue	Each
WC-03772	PROMAX HV - Hi-Viz Orange re original Weldclass products only. Any references to the trade nai	Each
The products advertised above a	re original Weldclass products only. Any references to the trade na	me Proban is for
identification purposes only. Wel	dclass is not affiliated in any way with the owner(s) of the trade nar	me Proban and the

FR HOOD FOR WELDING HELMET PROMAX BLUE (PROBAN STYLE)

- Blocks out annoying sunlight & reflections from behind the helmet
- Protects head, neck and ears from spatter, debris, sunburn, etc
- Fast and easy to fit to your welding helmet Supplied with self-stick hook & loop
- Great for site and field welders, overhead welding, etc
- For Protection During Welding, Cutting & Grinding
- Stop painful burns from spatter entering neck, collar, ears
 etc
- Improves vision and weld quality by blocking out light and reflection
- Open design allows good ventilation
- Lightweight and Cool flame-retardant cotton
- Sewn with Kevlar Heat-Resistant Thread to Prevent Seam Failure

Part No.	Description	Unit	
WC-05456	PROMAX Blue Helmet Hood	Each	
The products advertised above are original Weldclass products only. Any references to the trade name Proban is for identification purposes only. Weldclass is not affiliated in any way with the owner(s) of the trade name Proban and the products are not original proban.			



Idela



www.weldclass.com.au



LEATHER APRON PROMAX BLUE

- · 'Promax Blue' Premium Leather;
- Top Quality Split Cowhide Sourced from America & Italy
- Resists Ageing/Hardening, Remains Supple and Tough for longer
- Does not shed fibres like standard grey/chrome leather
- Riveted Stress Points & Double-Stitched with Kevlar = Longer Garment Life In Tough Conditions
- Utility Pocket for Tools, Rulers, Markers etc

Part No.	Description	Unit
WC-01753 (8-LAX01)	PROMAX Blue Leather Apron 900 x 600mm	Each

LEATHER JACKETS PROMAX BLUE

- 'Premium Blue' Leather;
- Top Quality Split Cowhide
- · Does not shed fibres like standard grey/chrome leather
- Adjustable Cuffs and Collar
- Front Pocket
- Double Stiched with Kevlar Heat-Resistant Thread with Rivets at pressure points
- For Protection During Welding, Cutting & Grinding
- With Pen pocket & front internal pocket



Weldclass

Part No.		Description	Unit
WC-01782	M		Each
WC-01781	L		Each
WC-01783	XL		Each
WC-01784	2XL		Each
WC-01785	3XL		Each



Available from a Distributor near You!



Weldclass Gloves, Apparel & Blankets

FR JACKETS PROMAX BLUE (PROBAN STYLE) W/ LEATHER SLEEVES





www.weldclass.com.au



FR JACKETS PROMAX BLUE FLAME (PROBAN STYLE)







FR JACKETS PROMAX 'HV2' W/LEATHER SLEEVES + HARNESS FLAP

The ultimate welding AND Safety Jacket!

Crafted with Attention to Detail:

- Double-Stiched with Kevlar and reinforced with rivets at pressure-points for longer garment life
- Large internal pocket, pen/ruler pockets
- Satin-lined shoulders for easier wear & removal
 Double Stiched with Kevlar Thread, with Rivets at
- pressure points (e.g. cuffs) to prevent seam failure
- 100% Cotton FR Material: More Durable & more Comfortable than Cotton/Polyester Fabrics

Part No.	Description	Unit	
WC-04762	Μ	Each	
WC-04763	L	Each	
WC-04764	XL	Each	
WC-04765	2XL	Each	
WC-04766	3XL	Each	
WC-04767	4XL	Each	
The products advertised above are original Weldclass products only. Any references to the trade name Proban is for identification purposes only. Weldclass is not affiliated in any way with the owner(s) of the trade name Proban and the products are not original proban.			

Leather Sleeves Made from top-quality cowhide, for long-lasting spatter protection

use



Extended Back Protects Lower Back when Bending, Kneeling, etc —



RefNow with 'X' PatternAlReflective on BackHaSuitable for Rail Industry

Harness Compatible Rear Opening/Flap Allows use with Safety Harness, if required

100% Flame Resistant including Silver Reflective Tap

Hi-Visibility Material with Reflective Tape for Day/Night use



 Approx' Chest Measurement in cm: M=121 / L=127 / XL=137 / 2XL=147 / 3XL=157 / 4XL=167





FR JACKETS PROMAX'HV5' cool, comfortable a incredibly cost effective ! Part No. Description Unit WC-05261 WC-05262 WC-05263 Each Μ Each XL Each WC-05264 The products advertised above identification purposes only. We products are not original proba 2XL re original Weldclass products only. Any references to the trade name Proban is for dclass is not affiliated in any way with the owner(s) of the trade name Proban and the **Light & Cool Flame-Retardant** Cotton for medium duty, affordable Stand-Up Collar Protection With adjustable flap for Full Closure & Protection **Flame-Retardant Stitching** Wide Hook & Loop Strip For firm closure (no **High-Vis Orange** studs to tear off) Welders deserve Hi-Vis Protection too! Pen / Scribe Pocket INDICATIVE PRICE 45⁰⁰ For your nearest Distributor Phone 1300 784 200 Prices are indicative only and may vary depending on volumes, freight cost, models/options & other factors **Internal Pocket SIZE INFO:**

 Approx' Chest Measurement in cm: M=121 / L=127 / XL=137 / 2XL=147



Deidelass

BLANKETS PROMAX LEATHER

- Heavy Duty Split Cowhide Leather
- Sewn with Heat-Resistant Kevlar Thread, for resistance to seam failure
- For protection against grinding sparks, light to medium spatter, indirect heat

with eyelets !

Part No.	Description	Unit
WC-01755	1.0m x 2.0m	Each
WC-03834	1.8m x 1.8m	Each
WC-01756	2.0m x 2.0m	Each
WC-01757	3.0m x 3.0m	Each





HI-TEMP BLANKET 550°C

- Tightly woven glass fabric
- 550°C working temperature (continuous exposure resistance)
- Smooth, non hairy low-irritant finish
- For protection against grinding sparks, light to medium spatter, intermittent low flame, etc
- Suitable for wrapping components that require slow cooling, heat treating and stress relief applications
- NOT recommended for protection against heavy slag or molten droplets

USER INFO:

- Always use on an incline of at least 15 degrees, when using for surface protection
- If protecting critical or costly surfaces/items, always use more layers initially, and test on a non-critical surface first

Part No.	Description	Unit
8-WB550/1018	Blanket 1.0m x 1.8m	Each
8-WB550/1820	Blanket 1.8m x 2.0m	Each
8-WB550/2030	Blanket 2.0m x 3.0m	Each
8-WB550/3030	Blanket 3.0m x 3.0m	Each
8-WB550/10RL	Roll 50m x 1.0m	Roll
8-WB550/15RL	Roll 50m x 1.5m	Roll

HI-TEMP BLANKET 1100°C

- Tightly woven glass fabric
- 1100°C working temperature (continuous exposure resistance)
- Smooth low-irritant finish
- For molten metal splash protection eg: oxy cutting, gouging, heavy spatter, intermittent flame, etc
- Suitable for retaining wrapping components that require slow cooling / heat-treating

USER INFO:

- If protecting critical or costly surfaces/items, always use more layers initially, and test on a non-critical surface first
- When using for surface protection: If possible use on an incline of at least 15 degrees, or when necessary to use in horizontal position add more layers

Part No.	Description	Unit
8-WBSG11/0918	Blanket 1.8 x 0.9m	Each
8-WBSG11/1820	Blanket 1.8 x 2.0m	Each
8-WBSG11/2030	Blanket 2.0 x 3.0m	Each
8-WBSG11/3030	Blanket 3.0 x 3.0m	Each
8-WBSG11/09RL	Roll 50 x 0.9m	Roll





CABLE COVERS SUIT TORCH CABLES

- Extends the Life of Torch Cables = Reduced Replacement / Repair Costs & Down-Time
- Velcro Style Fastening for Quick Fitting
- Premium Blue Heavy Duty Cowhide Leather, and Heat-Resistant Kevlar Thread
- Can be cut to length if required
- Ideal For MIG, TIG & Plasma Torch Cables
- Also suits all types of cables and hoses
- Protects against: hot metal burns, sparks and spatter and general wear and tear



Part No.	Description	Unit
8-CC4	4m x 150mm - Suit 3-4m MIG/TIG Torches	Each
8-CC7	7.5m x 150mm - Suit 7-8m TIG/ Plasma Torches	Each

CABLE COVERS SUIT WIRE-FEED CABLES

- Extends the Life of Torch Cables = Reduced Replacement / Repair Costs & Down-Time
- Velcro Style Fastening for Quick Fitting
- Premium Blue Heavy Duty Cowhide Leather, and Heat-Resistant Kevlar Thread
- Can be cut to length if required
- Ideal for MIG Welder Wire-Feeder cables
- Also suits all types of cables and hoses
- Protects against: hot metal burns, sparks and spatter and general wear and tear

nit	Part No.	Description	Unit
ch	8-CC8	8m x 200mm - Suit 8m Wire-Feeder Cables	Each
ch	8-CC10	10m x 200mm - Suit 10m Wire- Feeder Cables	Each

FR & LEATHER SLEEVES PROMAX BLUE

- · Elasticised ends for easy fitting
- No ties or straps
- Combination Leather & FR Cotton: Durable, yet light weight and cool



Part No.	Description	Unit
WC-05375	Sleeves Promax Blue Leather/FR	Each



Trading Terms & Conditions



Weldclass' Standard Trading Terms & Conditions can be viewed at: www.weldclass.com.au/StandardTradingTermsAndConditions





Available from a Distributor near You!





www.weldclass.com.au

Ph: I300 784 200 E: marketing@weldclass.com.au

Your Weldclass Distributor: