



Westinghouse

INNOVATION YOU CAN BE SURE OF

WHXC8500E-PRO Portable Generator

Westinghouse Professional Series generators offer the highest levels of performance, reliability and safety in compliance with Australian WH&S regulations. Featuring an RCD safety switch and weatherproof outlet(s) to protect against electric shock, they are an ideal portable power source to operate your electrical appliances and tools.

Features and Benefits

Reliable Performance

High output and fuel efficient Westinghouse 420 cc 4-stroke overhead valve petrol engine.

Effortless Starting

Strain-free electric starting at the push of a button. Heavy duty 12 Volt battery included.

Electrical Safety

RCD safety switch offers you WH&S mandated protection against electric shock.

Quiet Operation

Oversized Pulse-Flo muffler and anti-vibration rubber mounts ensure low noise output.

Long Running

Extended run time from the long range 25 litre fuel tank with integrated gauge and strainer.

Stable Power

Digital AVR controlled sine wave output for precise and stable electricity supply.

Premium Features

Copper wound alternator, full steel roll frame, fold-down handles and Never-Flat wheels.

Easy to Use

Yellow-coloured touch points guide you to the controls required for normal operation.

Plug and Play

Everything you need is in the box. Just add petrol. Minor assembly required.

Warranty Protection

2-year domestic use warranty to safeguard your investment (conditions apply).

6750/8500

RUNNING WATTS STARTING WATTS




SINE WAVE OUTPUT
AVR EQUIPPED

RCD
SAFETY
SWITCH

ELECTRIC START

Control Panel Functions

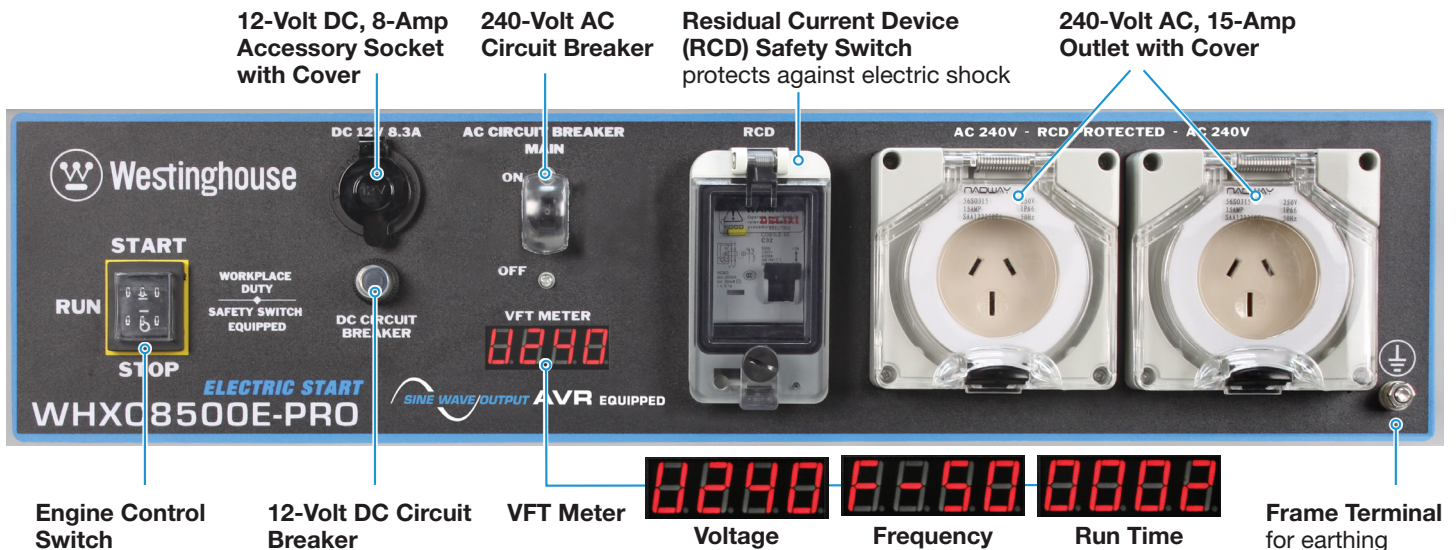

Power - when you need it - where you need it

Specifications

WHXC8500E-PRO

ENGINE	
Type	1-Cylinder, 4-Stroke, Overhead Valve, Air Cooled
Displacement (cc)	420
Speed (rpm)	3,000
Oil Capacity (mL)	1,000
Low Oil Shutdown	Yes
Spark Plug	Torch F6RTC
Fuel	Unleaded Petrol
Fuel Tank Capacity (L)	25
Fuel Gauge	Yes
Starting Methods	Electric and Recoil
Battery	12 V, Maintenance Free
Hour Meter	Yes
Run Time @ 50% Output (hr)	13.1
Noise Level @ 100% Output	80 dB(A) @ 7m
DIMENSIONS	
Length (mm)	735
Width (mm)	700
Height (mm)	655
WEIGHT	
Weight - Dry (kg)	94
Weight - Wet (kg)	113

240 VOLT AC ELECTRICAL	
Voltage (V)	240
Frequency (Hz)	50
Number of Phases	1
Continuous Running Power (W) *	6,750
Maximum Starting Power (W)	8,500
Continuous Running Current (A)	28.1
Alternator Windings	Copper
Voltage & Waveform Control	Digital Automatic Voltage Regulator Sine Wave Output
Receptacles	2 x 15 A, IP66
Overload Protection	Circuit Breaker
RCD Safety Switch	Yes
Digital VFT Meter	Yes
Electrical Enclosure	IP23
12 VOLT DC ELECTRICAL	
Voltage (V)	12
Maximum Current (A)	8.3
Maximum Power (W)	100

* Rated output at 1.0 power factor.

